

KOMBIC 150 DOWNLIGHT

K21RD3065OP830DWW



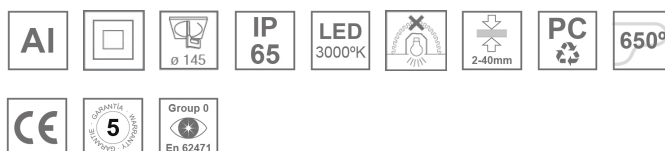
KOMBIC 150 RD 2800 IP65 WW OPAL DA WH/WH

Description:

Round recessed downlight model KOMBIC 150 RD 2800 IP65 WW OPAL DA WH/WH, LAMP brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Reflector made of polycarbonate. Matte white interior reflector and frame in white finish, and optical film, die cast aluminium heat sink. Model for LED COB, with 3000K colour temperature, CRI80 and control DALI gear included. IP65 protection rating. Insulation class II. Group 0 photobiological safety. Lifetime: 50.000h L70 B10.

Finish: Matte white RAL 9010**Weight:** 704 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	2.074 lm	°K :	3000
Plum:	19,9W	CRI :	80
Efficacy:	104,2 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	17.6W		

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 150 DOWNLIGHT

K21RD3065OP830DWW

KOMBIC 150 RD 2800 IP65 WW OPAL DA WH/WH

PHOTOMETRIC DATA :

