

## KOMBIC 150 DOWNLIGHT

K21RD3065OP830NWW



## KOMBIC 150 RD 2800 IP65 WW OPAL WH/WH


## Description:

Round recessed downlight model KOMBIC 150 RD 2800 IP65 WW OPAL WH/WH, LAMP brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Reflector made of polycarbonate. Matte blanc interior reflector and frame in white finish, and optical film, die cast aluminium heat sink. Model for LED COB, with 3000K colour temperature, CRI80 and control gear included. IP65 protection rating. Insulation class II. Group 0 photobiological safety. Lifetime: 50.000h L70 B10.

Finish: Matte white RAL 9010

Weight: 704 g


Installation: Recessed



## TECHNICAL SPECIFICATIONS:

|               |                          |               |                  |
|---------------|--------------------------|---------------|------------------|
| Light output: | 2.074 lm                 | °K :          | 3000             |
| Plum:         | 19,9W                    | CRI :         | 80               |
| Efficacy:     | 104,2 lm/w               | MacAdam:      | 3                |
| Type:         | COB                      | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L70 B10 (Ta=25°C) | Gear:         | Electronic       |
| Power:        | 17.6W                    |               |                  |

Light output tolerance +/- 10%

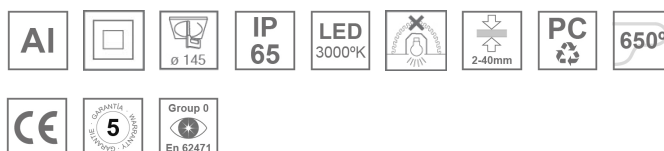

## CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD3065OP830NWW

KOMBIC 150 RD 2800 IP65 WW OPAL WH/WH

PHOTOMETRIC DATA :

