


## KOMBIC 150 DOWNLIGHT

K21RD3065VWMSWWW

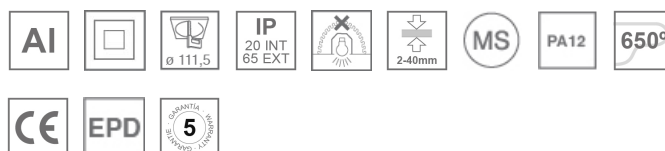
KOMBIC 150 RD 2800 IP65 MS VWF WI WH/WH.

**Description:**

Downlight recessed round model KOMBIC 150 RD 2800 MS WI Lamp brand. Extruded aluminium heatsink with active dissipation. Model for Multispectral LED equipped with 7 channels to provide any type of visible light spectrum between 420 nm and 730 nm wavelengths. Wireless or wired connectivity available. IP20 or IP65 protecting rating. Insulation class II. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010**Weight:** 704 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                    |                      |                  |
|----------------------|--------------------|----------------------|------------------|
| <b>Light output:</b> | 2.143 lm           | <b>CRI :</b>         | 90               |
| <b>Plum:</b>         | 67W                | <b>MacAdam:</b>      | 2                |
| <b>Efficacy:</b>     | 32 lm/w            | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>UGR:</b>          | 30                 | <b>Gear:</b>         | Electronic       |
| <b>Type:</b>         | HI POWER LEDMOTIVE |                      |                  |
| <b>LED Lifetime:</b> | 50.000 (Ta=25°C)   |                      |                  |
| <b>Power:</b>        | 60W                |                      |                  |

**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 150 DOWNLIGHT



K21RD3065VWMSWWW

KOMBIC 150 RD 2800 IP65 MS VWF WI WH/WH.

PHOTOMETRIC DATA :

