Product datasheet

KOMBIC 150 DOWNLIGHT

K21RD3523RW840DWW

KOMBIC 150 RD 3700 IP23 NW RF WF DA WH/W

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI80. Luminaire with electronic wiring DALI included. Insolation Class II. Lifetime: 66.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.



Finish: Matte white RAL 9010

Weight: 704 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	3.420 lm	**ºK :**	4000
Plum:	28,3W	**CRI :**	80
Efficacy:	120,8 lm/w	**MacAdam:**	3
UGR:	<19	**Power Supply:**	220-240V 50/60Hz
Type:	COB	**Gear:**	Adjustable DALI
LED Lifetime:	66.000 L80 B10 (Ta=25ºC)		
Power:	25W		

Light output tolerance +/- 10%

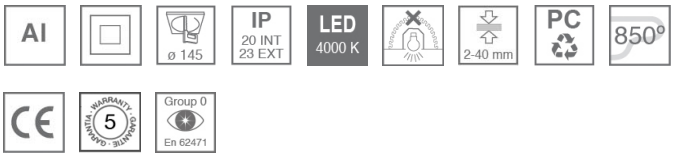

CUSTOM MADE OPTIONS:

KOMBIC 150 DOWNLIGHT

K21RD3523RW840DWW **KOMBIC 150 RD 3700 IP23 NW RF WF DA WH/W**

PHOTOMETRIC DATA :

K21RD3523RW840DWW

η = 100%

Imax = 1342 cd/klm

UTE:

CIE: 98 100 100 100 100



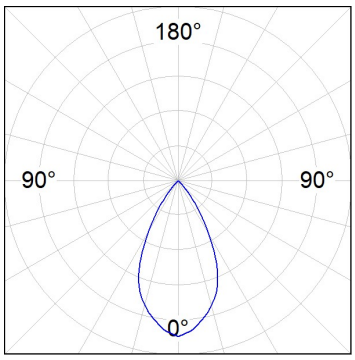

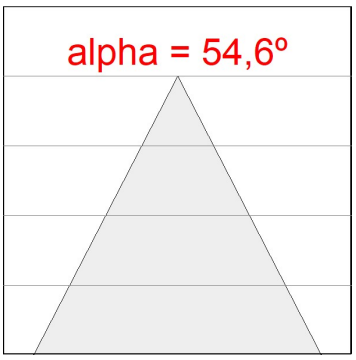

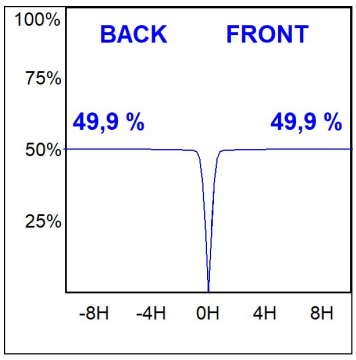

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU