

## KOMBIC 150 DOWNLIGHT

K21RD3540WF830DBW



## KOMBIC 150 RD 3700 IP43 WW WFL DA BK/WH

## Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CR80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011

Weight: 704 g




Installation: Recessed

## TECHNICAL SPECIFICATIONS:

Light output:	2.388 lm	°K :	3000
Plum:	19W	CRI :	80
Efficacy:	125,7 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI
LED Lifetime:	100.000h L90 B10 (Ta=25°C)		
Power:	17W		

Light output tolerance +/- 10%

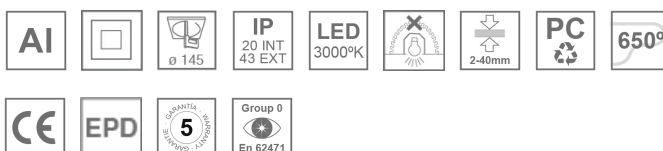

## CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD3540WF830DBW

KOMBIC 150 RD 3700 IP43 WW WFL DA BK/WH

PHOTOMETRIC DATA :

