

KOMBIC 150 DOWNLIGHT

K21RD3540WF830NMW




KOMBIC 150 RD 3700 IP43 WW WFL MA/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CR80. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate

Weight: 704 g

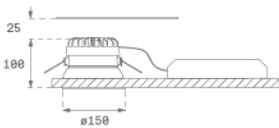


Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|----------------------------|---------------|------------------|
| Light output: | 2.395 lm | °K : | 3000 |
| Plum: | 19W | CRI : | 80 |
| Efficacy: | 126,1 lm/w | MacAdam: | 3 |
| UGR: | <19 | Power Supply: | 220-240V 50/60Hz |
| Type: | COB | Gear: | Electronic |
| LED Lifetime: | 100.000h L90 B10 (Ta=25°C) | | |
| Power: | 17W | | |

Light output tolerance +/- 10%

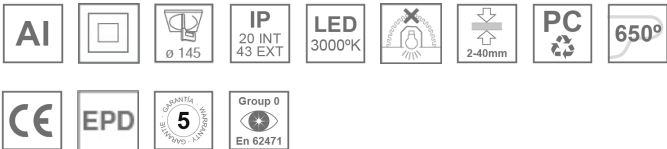

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD3540WF830NMW

KOMBIC 150 RD 3700 IP43 WW WFL MA/WH

PHOTOMETRIC DATA :

