


KOMBIC 150 DOWNLIGHT

K21RD3540WW840NWW




KOMBIC 150 RD 3700 IP43 NW WW WH/WH

Description:

LAMP Round recessed downlight KOMBIC 150 RD 3700. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 4000K and CRI80. Electronic ON OFF gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finishes: White and black. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 725 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 2.530 lm | °K : | 4000 |
| Plum: | 27,7W | CRI : | 80 |
| Efficacy: | 91,3 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 60.000 L80 B10 (Ta=25°C) | Gear: | Electronic |
| Power: | 25W | | |

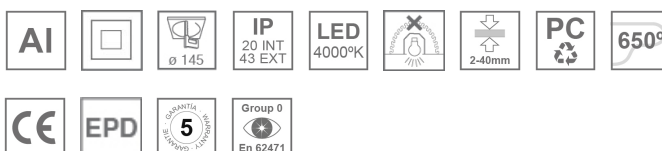Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 150 DOWNLIGHT

K21RD3540WW840NWW

KOMBIC 150 RD 3700 IP43 NW WW WH/WH

PHOTOMETRIC DATA :

