### Product datasheet

## **KOMBIC 150 SURFACE**

#### K21SF2040OP930DMB



ø150mm

180

#### KOMBIC 150 SF 2400 IP43 9WW OP DA MA/BK

#### **Description:**

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of black aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector and optical film. Heatsink made of diecast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate

Weight: 1.478 g

Installation: Surface

#### **TECHNICAL SPECIFICATIONS:**

Light output:	1.710 lm	⁰K :	3000
Plum:	19,8W	CRI :	90
Efficacy:	86,4 lm/w	R9 :	57
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25⁰C)	Power Supply:	220-240V 50/60Hz
Power:	17,6W	Gear:	Adjustable DALI

### Light output tolerance +/- 10%



### **CUSTOM MADE OPTIONS:**



Worktitude for light


# **KOMBIC 150 SURFACE**

K21SF2040OP930DMB

KOMBIC 150 SF 2400 IP43 9WW OP DA MA/BK



### **PHOTOMETRIC DATA :**

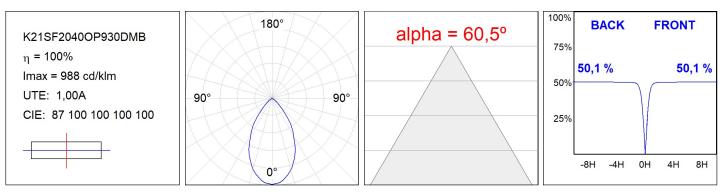

### Product datasheet

# **KOMBIC 150 SURFACE**

## ACCESORIES :

## Suspension



Product code: K21SUADLATBK

Description: KOMBIC 150 SF ADAPT. LATERAL CABLE BK



Product code: K21SUADLATWH

Description: KOMBIC 150 SF ADAPT. LATERAL CABLE WH

Worktitude for light