KOMBIC 150 SURFACE

K21SF2040OPWB4NWW

KOMBIC 150 SF 1800 IP43 WBN OP WH/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector and optical film. Heatsink made of diecast aluminium. COB LED, colour temperature Wellbeing de 4000K con CRI95 and Ra greater than 50. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 60.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Finish: Matte white RAL 9010

Weight: 1.478 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.474 lm	°K :	4000
Plum:	19W	CRI :	95
Efficacy:	77,6 lm/w	R9 :	99
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	60.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	18W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


KOMBIC 150 SURFACE


K21SF2040OPWB4NWW

KOMBIC 150 SF 1800 IP43 WBN OP WH/WH



PHOTOMETRIC DATA :

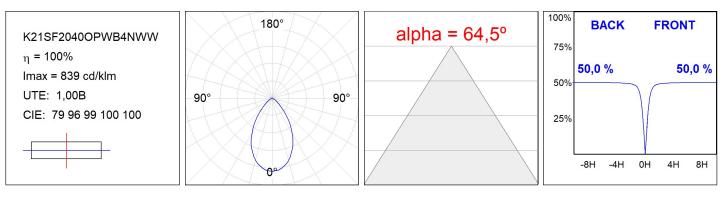

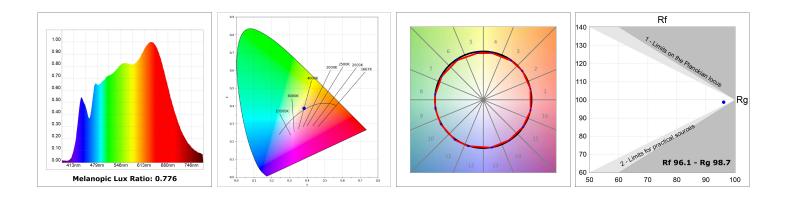

Product datasheet

KOMBIC 150 SURFACE

ACCESORIES :

Suspension



Product code: K21SUADLATBK

Description: KOMBIC 150 SF ADAPT. LATERAL CABLE BK



Product code: K21SUADLATWH

Description: KOMBIC 150 SF ADAPT. LATERAL CABLE WH

Worktitude for light