

## KOMBIC 150 SURFACE

K21SF2040WFWB4DMB

- KOMBIC 150 SF 1800 IP43 WBN WFL DA MA/BK

**Description:**

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of black aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI95. Luminaire with electronic wiring DALI included. Insulation Class I. Lifetime: 86.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<16. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** metalized polycarbonate mate

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.697 lm	<b>°K :</b>	4000
<b>Plum:</b>	20W	<b>CRI :</b>	95
<b>Efficacy:</b>	82,9 lm/w	<b>R9 :</b>	88
<b>UGR:</b>	<16		
<b>LED Lifetime:</b>	86.000h L80 B10 (Ta=25°C)		
<b>Power:</b>	17,3W		

*Light output tolerance +/- 10%*



**CUSTOM MADE OPTIONS:**

KOMBIC 150 SURFACE

K21SF2040WFWB4DMB

KOMBIC 150 SF 1800 IP43 WBN WFL DA MA/BK

PHOTOMETRIC DATA :

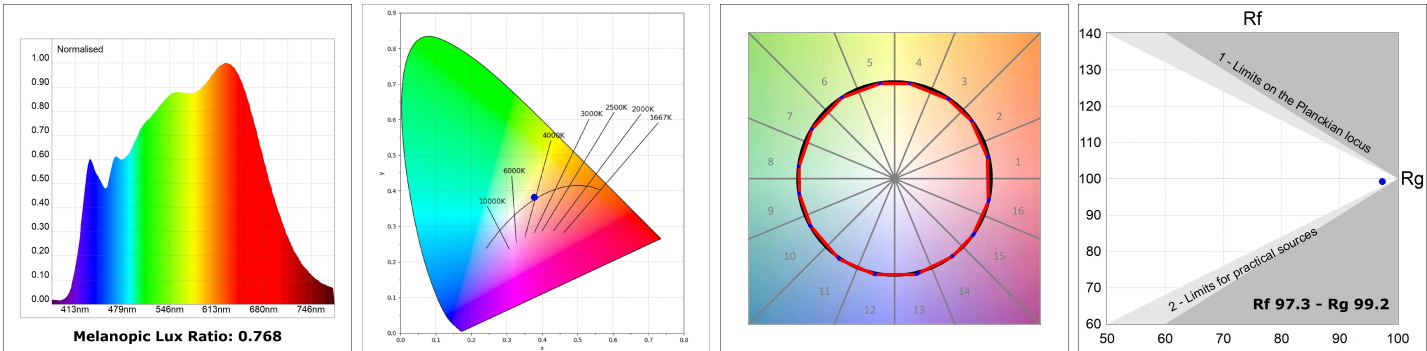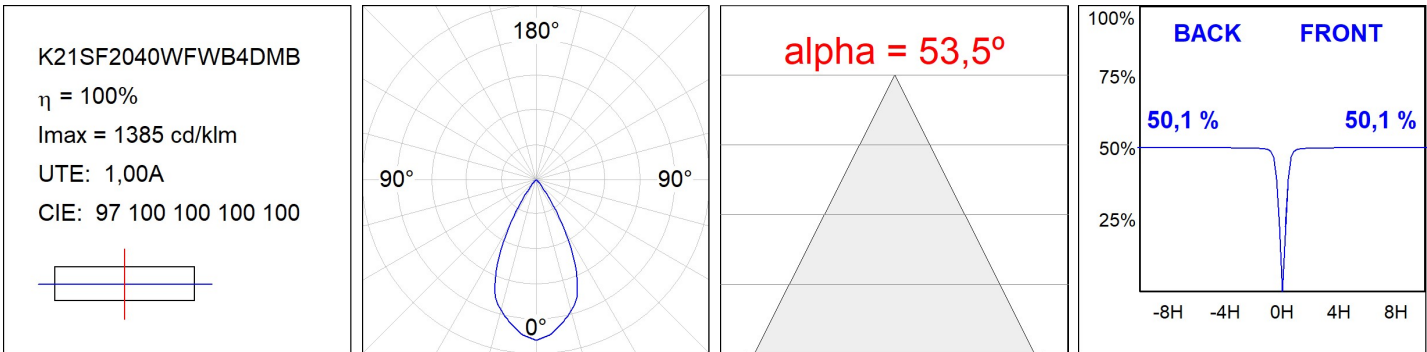

KOMBIC 150 SURFACE

ACCESORIES :

Suspension



**Product code:**  
K21SUADLATBK

**Description:**  
KOMBIC 150 SF ADAPT. LATERAL CABLE BK



**Product code:**  
K21SUADLATWH

**Description:**  
KOMBIC 150 SF ADAPT. LATERAL CABLE WH