

K21SF2540WFWB3NWB

- KOMBIC 150 SF 2500 IP43 WBW WFL WH/BK

Description:

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of black aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI95. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 86.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<16. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

TECHNICAL SPECIFICATIONS:

Light output:	2.089 lm	°K :	3000
Plum:	28W	CRI :	95
Efficacy:	74,6 lm/w	R9 :	98
UGR:	<16		
LED Lifetime:	86.000h L80 B10 (Ta=25°C)		
Power:	24,9W		

Light output tolerance +/- 10%

**CUSTOM MADE OPTIONS:**








KOMBIC 150 SURFACE

K21SF2540WFWB3NWB

KOMBIC 150 SF 2500 IP43 WBW WFL WH/BK

PHOTOMETRIC DATA :

K21SF2540WFWB3NWB
 $\eta = 100\%$
 $I_{max} = 1347 \text{ cd/klm}$
 UTE: 1,00A
 CIE: 95 99 100 100 100

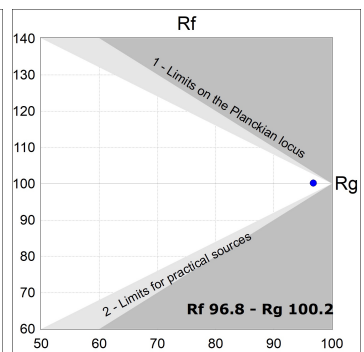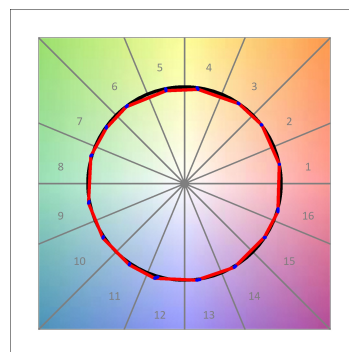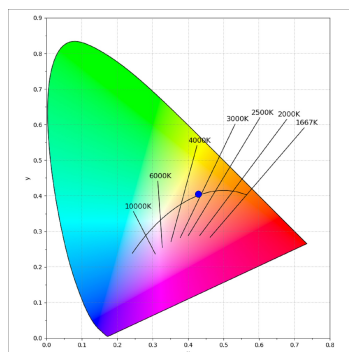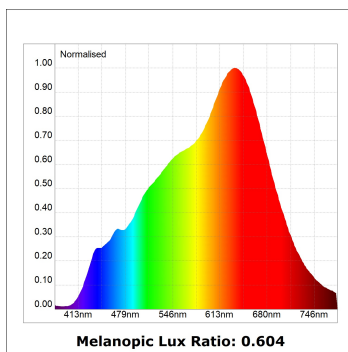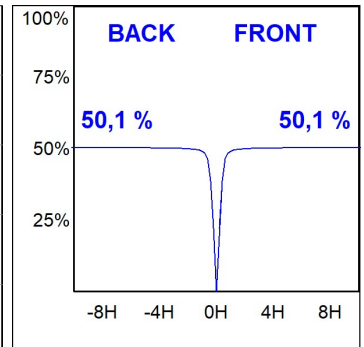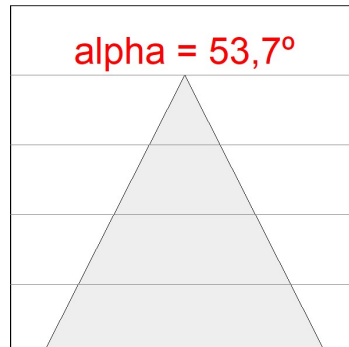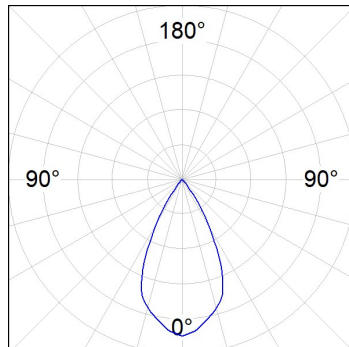

ACCESORIES :

Suspension



Product code:
K21SUADLATBK

Description:
KOMBIC 150 SF ADAPT. LATERAL CABLE BK



Product code:
K21SUADLATWH

Description:
KOMBIC 150 SF ADAPT. LATERAL CABLE WH