

K21SF2540WFWB4NWB

- KOMBIC 150 SF 2500 IP43 WBN WFL WH/BK

**Description:**

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of black aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI95. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 86.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<16. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	2.192 lm	<b>°K :</b>	4000
<b>Plum:</b>	28W	<b>CRI :</b>	95
<b>Efficacy:</b>	78,3 lm/w	<b>R9 :</b>	88
<b>UGR:</b>	<16		
<b>LED Lifetime:</b>	86.000h L80 B10 (Ta=25°C)		
<b>Power:</b>	24,9W		

*Light output tolerance +/- 10%***CUSTOM MADE OPTIONS:**








# KOMBIC 150 SURFACE

K21SF2540WFWB4NWB

KOMBIC 150 SF 2500 IP43 WBN WFL WH/BK

**PHOTOMETRIC DATA :**

K21SF2540WFWB4NWB  
 $\eta = 100\%$   
 $I_{max} = 1344 \text{ cd/klm}$   
 UTE: 1,00A  
 CIE: 95 99 100 100 100

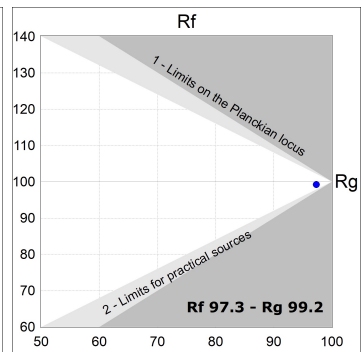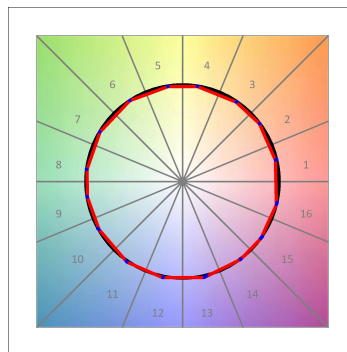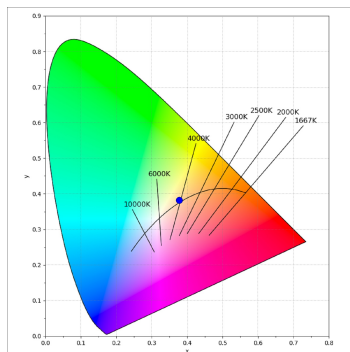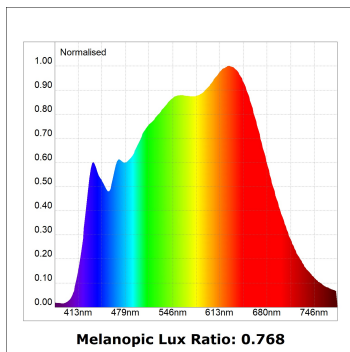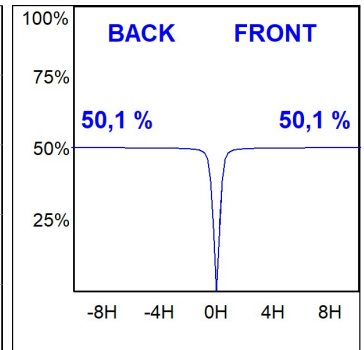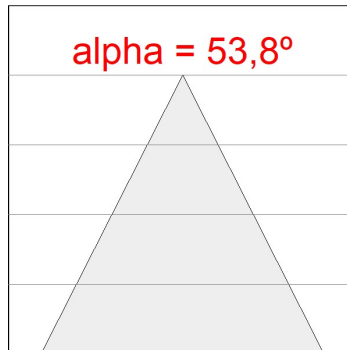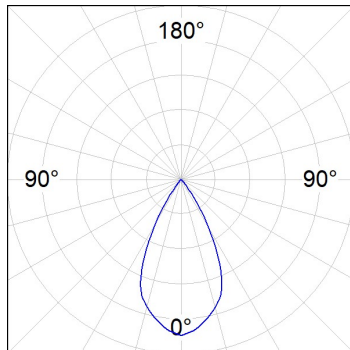

**ACCESORIES :**

**Suspension**



**Product code:**  
K21SUADLATBK

**Description:**  
KOMBIC 150 SF ADAPT. LATERAL CABLE BK



**Product code:**  
K21SUADLATWH

**Description:**  
KOMBIC 150 SF ADAPT. LATERAL CABLE WH