

K21SF2540WF4NWW

- KOMBIC 150 SF 2500 IP43 WBN WFL WH/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI95. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 86.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<16. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|---------------------------|--------------|------|
| Light output: | 2.192 lm | °K : | 4000 |
| Plum: | 28W | CRI : | 95 |
| Efficacy: | 78,3 lm/w | R9 : | 88 |
| UGR: | <16 | | |
| LED Lifetime: | 86.000h L80 B10 (Ta=25°C) | | |
| Power: | 24,9W | | |


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 150 SURFACE

K21SF2540WFWB4NWW

KOMBIC 150 SF 2500 IP43 WBN WFL WH/WH

PHOTOMETRIC DATA :

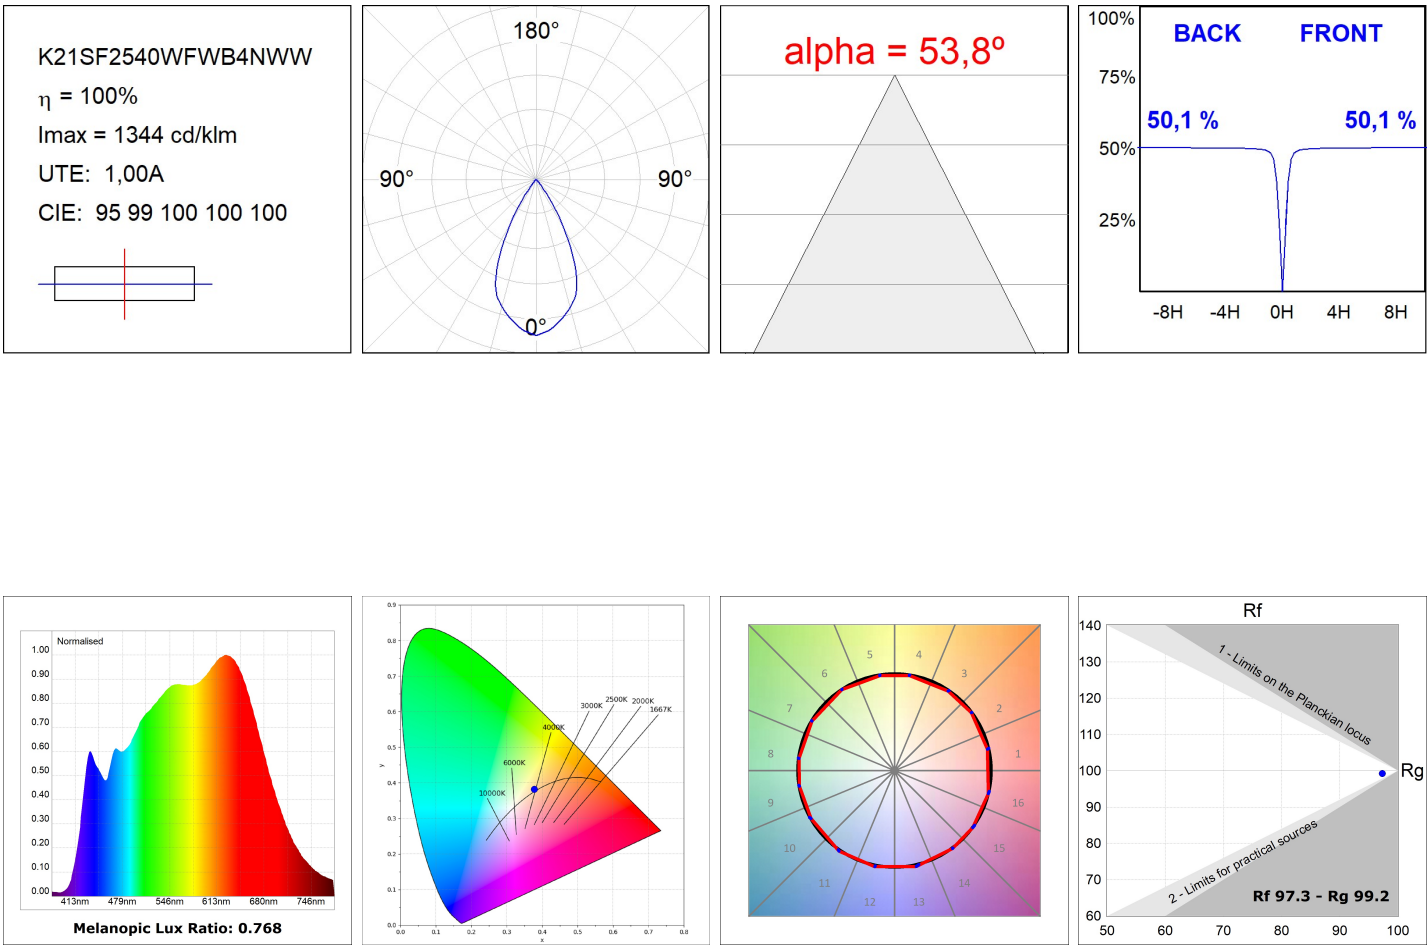

KOMBIC 150 SURFACE

ACCESORIES :

Suspension



Product code:
K21SUADLATBK

Description:
KOMBIC 150 SF ADAPT. LATERAL CABLE BK



Product code:
K21SUADLATWH

Description:
KOMBIC 150 SF ADAPT. LATERAL CABLE WH