

# KOMBIC 150 SURFACE

K21SF3040WF930DWW




## KOMBIC 150 SF 3200 IP43 9WW WFL DA WH/WH

### Description:

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class I. Lifetime: 50.000 L70 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010

**Weight:** 1.738 g




**Installation:** Surface

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	1.838 lm	<b>°K :</b>	3000
<b>Plum:</b>	28W	<b>CRI :</b>	90
<b>Efficacy:</b>	65,7 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	COB	<b>Gear:</b>	Adjustable DALI
<b>LED Lifetime:</b>	50.000 L70 B10 (Ta=25°C)		
<b>Power:</b>	25W		

*Light output tolerance +/- 10%*

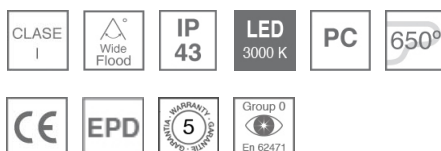

### CUSTOM MADE OPTIONS:



# KOMBIC 150 SURFACE

K21SF3040WF930DWW

KOMBIC 150 SF 3200 IP43 9WW WFL DA WH/WH

**PHOTOMETRIC DATA :**

K21SF3040WF930DWW  
 $\eta = 100\%$   
 $I_{max} = 1140 \text{ cd/klm}$   
 UTE: 1,00A  
 CIE: 96 99 100 100 100

