

KOMBIC 150 SURFACE


K21SF3040WF930DWW



KOMBIC 150 SF 3200 IP43 9WW WFL DA WH/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class I. Lifetime: 50.000 L70 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 1.738 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	1.838 lm	°K :	3000
Plum:	28W	CRI :	90
Efficacy:	65,7 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI
LED Lifetime:	50.000 L70 B10 (Ta=25°C)		
Power:	25W		



Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 150 SURFACE

K21SF3040WF930DWW

KOMBIC 150 SF 3200 IP43 9WW WFL DA WH/WH

PHOTOMETRIC DATA :

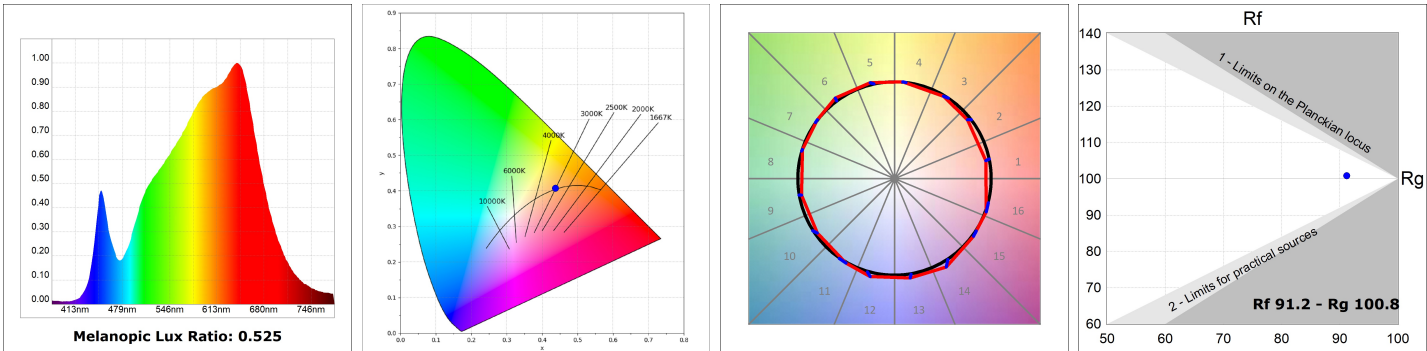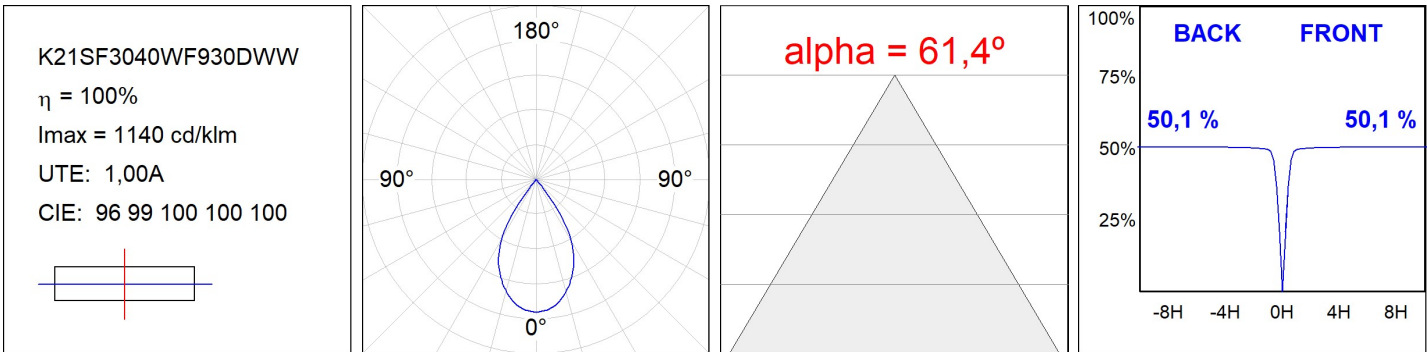

KOMBIC 150 SURFACE

ACCESORIES :

Suspension



Product code:
K21SUADLATBK

Description:
KOMBIC 150 SF ADAPT. LATERAL CABLE BK



Product code:
K21SUADLATWH

Description:
KOMBIC 150 SF ADAPT. LATERAL CABLE WH