Product datasheet

KOMBIC 150 SURFACE

K21SF3540OP830NMW

KOMBIC 150 SF 3700 IP43 WW OPAL MA/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI80. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Finish: metalized polycarbonate mate

Weight: 1.478 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.673 lm	**ºK :**	3000
Plum:	28W	**CRI :**	80
Efficacy:	95,5 lm/w	**MacAdam:**	3
Type:	COB	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25ºC)	**Gear:**	Electronic
Power:	25W		

Light output tolerance +/- 10%

CLASE I | IP 43 | LED 3000 K | PC | 650º | CE | EPD | 5 | Group 0 En 62471

CUSTOM MADE OPTIONS:

1-10V | lm | LED RETAIL | PUSH | TRIAC | K

KOMBIC 150 SURFACE

K21SF3540OP830NMW **KOMBIC 150 SF 3700 IP43 WW OPAL MA/WH**

PHOTOMETRIC DATA :

K21SF3540OP830NMW

η = 100%

Imax = 988 cd/klm

UTE: 1,00A

CIE: 87 100 100 100 100



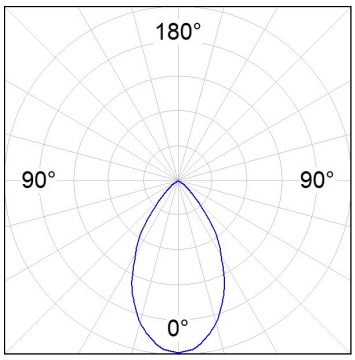

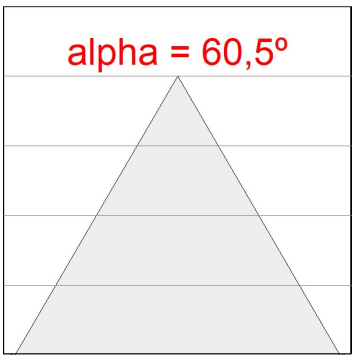

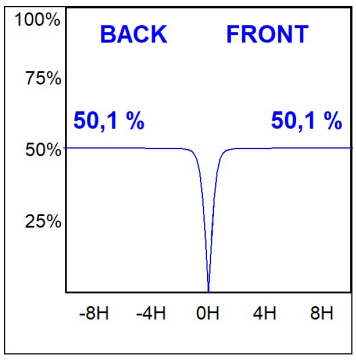

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

ACCESORIES :

Suspension

Product code:	Description:
K2SUCARG0500DB	KOMBIC 150 SF ACC ELEC 5P RIGI SUS 0.5 B
K2SUCARG0500NB	KOMBIC 150 SF ACC ELEC 3P RIGI SUS 0.5 B
K2SUCARG1000DB	KOMBIC 150 SF ACC ELEC 5P RIGI SUS 1M B
K2SUCARG1000NB	KOMBIC 150 SF ACC ELEC 3P RIGI SUS 1M B

Product code:	Description:
K2SUCARG0500DW	KOMBIC 150 SF ACC ELEC 5P RIGI SUS 0.5 W
K2SUCARG0500NW	KOMBIC 150 SF ACC ELEC 3P RIGI SUS 0.5 W
K2SUCARG1000DW	KOMBIC 150 SF ACC ELEC 5P RIGI SUS 1M W
K2SUCARG1000NW	KOMBIC 150 SF ACC ELEC 3P RIGI SUS 1M W

Product code:	Description:
K2SUCAWI2000DB	KOMBIC 150 SF ACC. ELEC 5P SUSP 2M BK.
K2SUCAWI2000NB	KOMBIC 150 SF ACC. ELEC 3P SUSP 2M BK.

Product code:	Description:
K2SUCAWI2000DW	KOMBIC 150 SF ACC. ELEC 5P SUSP 2M WH
K2SUCAWI2000NW	KOMBIC 150 SF ACC. ELEC 3P SUSP 2M WH.

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU