

K31RD3040OP830DRW




KOMBIC 200 RD 3000 IP44 WW OPAL DA BR/WH

Description:

Round Recessed downlight model KOMBIC 200 RD, LAMP brand. Interior diffuser made of opal polycarbonate specially for LED, injection aluminium dissipator and torkit type easy-fit fastening system. Model for MID-POWER LED, with 3000K colour temperature and CRI 80 and control DALI gear included. IP44 protection rating. Insulation class II. Lifetime: 50.000h L80 B10

Finish: BRILLIANT METALLIC POLYCARBONATE

Weight: 976 g



Installation: Recessed

TECHNICAL SPECIFICATIONS:

 Light output:
 2.065 lm
 ⁰K:
 3000

 Plum:
 18,1W
 CRI:
 80

 Efficacy:
 114,1 lm/w
 MacAdam:
 3

UGR: <19 **Power Supply**: 220-240V 50/60Hz

Type: MID POWER LED Gear: Adjustable DALI

LED Lifetime: 50.000 L80 B10 (Ta=25°C)

Power: 17W

Light output tolerance +/- 10%

























CUSTOM MADE OPTIONS:






















Data according to regulations 2019/2020/EU and 2019/2015/EU





K31RD3040OP830DRW

KOMBIC 200 RD 3000 IP44 WW OPAL DA BR/WH

PHOTOMETRIC DATA:





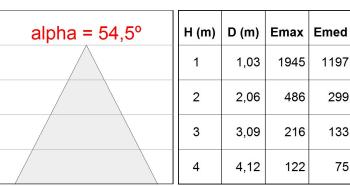



ACCESORIES:

Optical



Product code: ADRD250W

Description:

KOMBIC ACC. Ø250 ADAPTER RING WH.



Product code: DITRRD240B

Description:

DOMO 220/KOMBIC ACC.TRANSP GLASS BK.



Product code:

Description:

DITRRD240G DOMO 220/KOMBIC ACC.TRANSP GLASS GR.

DITRRD240W DOMO 220/KOMBIC ACC.TRANSP GLASS WH.



Product code: RIRD240B

Description:

DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:

Description:

RIRD240G DOMO 220/KOMBIC ACC. DECO RING GR. RIRD240W DOMO 220/KOMBIC ACC. DECO RING WH.



