KOMBIC 200 DOWNLIGHT


K31RD4040OP830NRW



KOMBIC 200 RD 4000 IP44 WW OPAL BR/WH

Description:

Round recessed downlight model KOMBIC 200 RD, LAMP brand. Interior diffuser made of opal methacrylate specially for LED and bright metallic reflector, injection aluminium dissipator and TOR KIT type easy-fit fastening system. Model for MID-POWER LED, with 3000K colour temperature and CRI 80 and control gear included. IP44 protection rating. Insulation class II. Photobiological safety group 0. Lifetime: 50.000h L80 B10



BRILLIANT METALLIC POLYCARBONATE Finish:

Weight: 976 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output: 2.800 lm °K: 3000 Plum: 25,4W CRI: 80 Efficacy: 110,2 lm/w 3 MacAdam:

UGR: <19

Type: MID POWER LED

LED Lifetime: 50.000 L80 B10 (Ta=25°C)

24W Power:

Light output tolerance +/- 10%



















Power Supply:

Gear:

220-240V 50/60Hz

Electronic









CUSTOM MADE OPTIONS:









Data according to regulations 2019/2020/EU and 2019/2015/EU














KOMBIC 200 DOWNLIGHT





K31RD4040OP830NRW

KOMBIC 200 RD 4000 IP44 WW OPAL BR/WH

PHOTOMETRIC DATA:





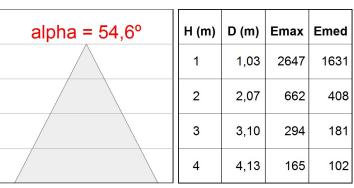

KOMBIC 200 DOWNLIGHT



ACCESORIES:

Optical



Product code: ADRD250W

Description:

KOMBIC ACC. Ø250 ADAPTER RING WH.



Product code: DITRRD240B

Description:

DOMO 220/KOMBIC ACC.TRANSP GLASS BK.



Product code:

Description:

DITRRD240G DOMO 220/KOMBIC ACC.TRANSP GLASS GR.

DITRRD240W DOMO 220/KOMBIC ACC.TRANSP GLASS WH.



Product code: RIRD240B

Description:

DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:

Description:

RIRD240G DOMO 220/KOMBIC ACC. DECO RING GR. RIRD240W DOMO 220/KOMBIC ACC. DECO RING WH.