


KOMBIC 200 DOWNLIGHT

K31RD50400P830NMW



KOMBIC 200 RD 5000 IP44 WW OPAL MA/WH

Description:


Round recessed downlight model KOMBIC 200 RD, LAMP brand. Interior diffuser made of opal methacrylate specially for LED and matt metallic reflector, injection aluminium dissipator and TOR KIT type easy-fit fastening system. Model for MID POWER LED, with 3000K colour temperature and CRI 80 and control gear included. IP44 protection rating. Insulation class II. Lifetime: 50.000h L70 B10

Finish: metalized polycarbonate mate

Weight: 1.536 g

Installation: Recessed
TECHNICAL SPECIFICATIONS:

Light output:	3.576 lm	°K :	3000
Plum:	38,1W	CRI :	80
Efficacy:	93,9 lm/w	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Electronic
Power:	36W		

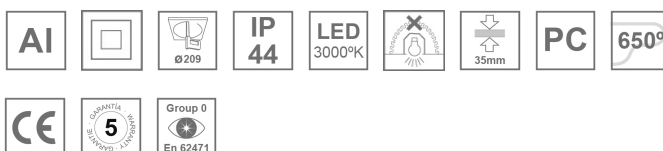
Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

KOMBIC 200 DOWNLIGHT

K31RD5040OP830NMW

KOMBIC 200 RD 5000 IP44 WW OPAL MA/WH

PHOTOMETRIC DATA :

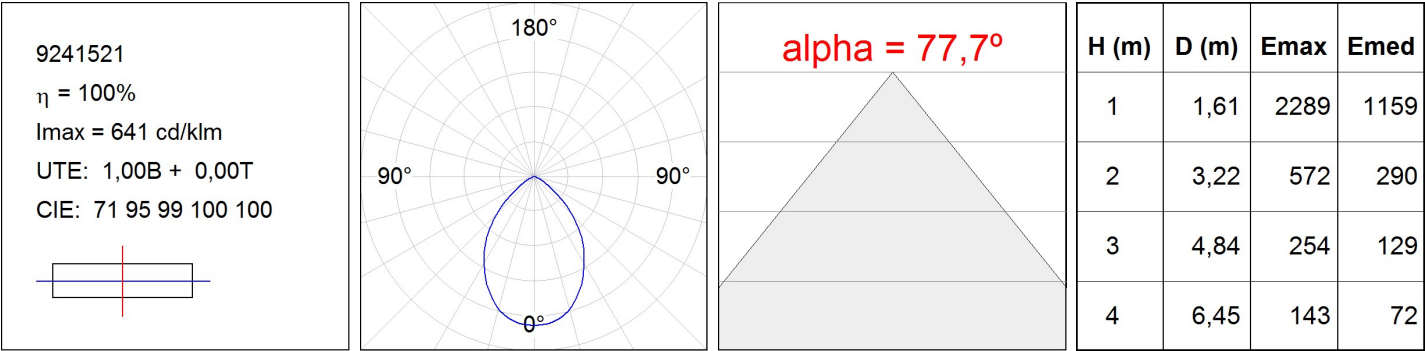

ACCESORIES :

Optical




Product code:

ADRD250W

Description:

KOMBIC ACC. Ø250 ADAPTER RING WH.



Product code:

DITRRD240B

Description:

DOMO 220/KOMBIC ACC. TRANSP GLASS BK.



Product code:

DITRRD240G

Description:

DOMO 220/KOMBIC ACC. TRANSP GLASS GR.

DITRRD240W

DOMO 220/KOMBIC ACC. TRANSP GLASS WH.



Product code:

RIRD240B

Description:

DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:

RIRD240G

Description:

DOMO 220/KOMBIC ACC. DECO RING GR.

RIRD240W

DOMO 220/KOMBIC ACC. DECO RING WH.

KOMBIC 200 DOWNLIGHT

