

K31RD5040OP840NRW



KOMBIC 200 RD 5000 IP44 NW OPAL BR/WH

Description:

Round recessed downlight model KOMBIC 200 RD, LAMP brand. Interior diffuser made of opal methacrylate specially for LED and bright metallic reflector, injection aluminium dissipator and TOR KIT type easy-fit fastening system. Model for MID POWER LED, with 4000K colour temperature and CRI 80 and control gear included. IP44 protection rating. Insulation class II. Lifetime: 50.000h L70 B10

Finish: BRILLIANT METALLIC POLYCARBONATE

Weight: 1.536 g



Installation: Recessed

TECHNICAL SPECIFICATIONS:

 Light output:
 4.016 lm
 °K:
 4000

 Plum:
 38,1W
 CRI:
 80

 Efficacy:
 105,4 lm/w
 MacAdam:
 3

Type: MID POWER PHILIPS Power Supply: 220-240V 50/60Hz

LED Lifetime: 50.000 L70 B10 (Ta=25°C) Gear: Electronic

Power: 36W

Light output tolerance +/- 10%























CUSTOM MADE OPTIONS:


























K31RD5040OP840NRW

KOMBIC 200 RD 5000 IP44 NW OPAL BR/WH

PHOTOMETRIC DATA:





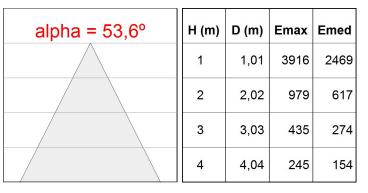



ACCESORIES:

Optical



Product code: ADRD250W Description:

KOMBIC ACC. Ø250 ADAPTER RING WH.



Product code: DITRRD240B Description:

DOMO 220/KOMBIC ACC.TRANSP GLASS BK.



Product code:

Description:

DITRRD240G DOMO 220/KOMBIC ACC.TRANSP GLASS GR.

DITRRD240W DOMO 220/KOMBIC ACC.TRANSP GLASS WH.



Product code: RIRD240B Description:

DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:

Description:

RIRD240G DOMO 220/KOMBIC ACC. DECO RING GR.
RIRD240W DOMO 220/KOMBIC ACC. DECO RING WH.



