KOMBIC 200 SURFACE



K31SF4020OP830NRW



KOMBIC 200 SF 4000 IP20 WW OPAL BR/WH


Description:

Suspended or ceiling mountingDownlight model KOMBIC 200 SF, LAMP brand. Made of white colour injected polycarbonate with shiny metallized reflector and interior diffuser made of opal methacrylate. Passive dissipation for a proper thermal management. Model for MID POWER LED with 3000K temperature and CRI 80 and control gear included. Insulation class II. Photobiological safety group 0. Lifetime: 50.000h L80 B10

BRILLIANT METALLIC POLYCARBONATE Finish:

Weight: 2.262 g

Installation: Surface



TECHNICAL SPECIFICATIONS:

Light output: 2.800 lm °K: 3000 Plum: 25,8W CRI: 80 Efficacy: 108,5 lm/w 3 MacAdam:

Type: MID POWER LED Power Supply: 220-240V 50/60Hz

LED Lifetime: 50.000 L80 B10 (Ta=25°C) Gear: Electronic

24W Power:

Light output tolerance +/- 10%





















CUSTOM MADE OPTIONS:









Data according to regulations 2019/2020/EU and 2019/2015/EU


















KOMBIC 200 SURFACE





K31SF4020OP830NRW

KOMBIC 200 SF 4000 IP20 WW OPAL BR/WH

PHOTOMETRIC DATA:





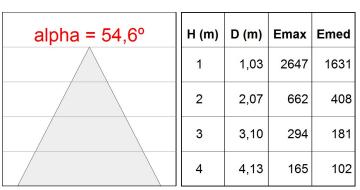

Product datasheet

KOMBIC 200 SURFACE



ACCESORIES:

Assembly



Product code:

Description:

K3SUCOW KOMBIC 200 SF ACC. COVER

ACCESORIES:

Suspension



Product code:

SUCARG0100G SUCARG0250G SUCARG0500G SUCARG1000G

Description:

ACC. ELECMEC RIGID SUSP 100MM GR.
ACC. ELECMEC RIGID SUSP 250MM GR.
ACC. ELECMEC RIGID SUSP 500MM GR.
ACC. ELECMEC RIGID SUSP 1000MM GR.



Product code:

SUCARG0100W SUCARG0250W SUCARG0500W SUCARG1000W

Description:

ACC. ELECMEC RIGID SUSP 100MM WH.

ACC. ELECMEC RIGID SUSP 250MM WH.

ACC. ELECMEC RIGID SUSP 500MM WH.

ACC. ELECMEC RIGID SUSP 1000MM WH.



Product code:

SUEM2W3000NG

Description:

ACC. DB ELECMEC SUSP GR.



Product code:

SUEM2W3000NW

Description:

ACC. DB ELECMEC SUSP WH.