

KOMBIC 200 DOWNLIGHT

K32RD30400P830DMW




KOMBIC 200 G2 RD 3000 IP44 WW OP DA MA/W

Description:


Round recessed downlight KOMBIC 200 G2 RD 3000 Reflector made of recycled polycarbonate. Inner reflector finished in mat metallized. Elliptical optic option is the perfect choice for lighting walkways and longitudinal areas such as counters or areas adjacent to work areas. This product allows for increased spacing between luminaires, reducing the effect of residual light on walls and providing a pleasant atmosphere in the space. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 3000K and CRI80. Electronic DALI gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 82.000 L80 B10. Available finish: White. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate

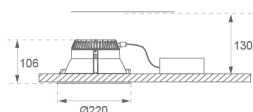Weight: 751 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

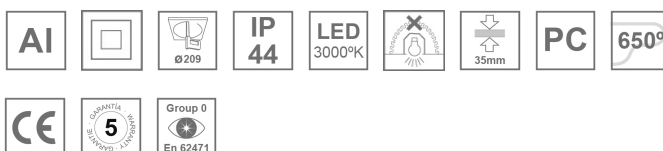Light output:	2.138 lm	°K :	3000
Plum:	16,7W	CRI :	80
Efficacy:	128 lm/w	MacAdam:	3
UGR:	>19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI2
LED Lifetime:	82.000 L80 B10 (Ta=25°C)		
Power:	14,5W		

Light output tolerance +/- 10%


CUSTOM MADE OPTIONS:




KOMBIC 200 DOWNLIGHT

K32RD30400P830DMW

KOMBIC 200 G2 RD 3000 IP44 WW OP DA MA/W

PHOTOMETRIC DATA :

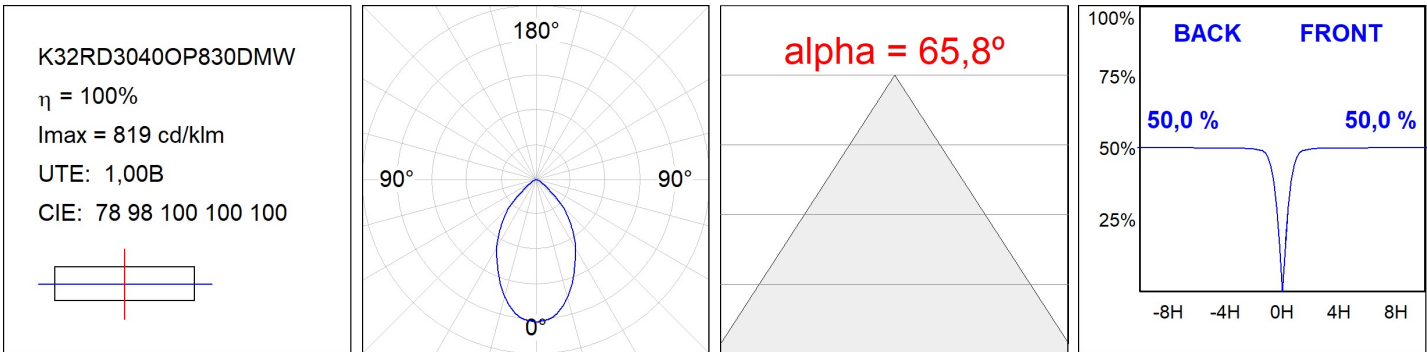

KOMBIC 200 DOWNLIGHT

ACCESORIES :

Optical



Product code:
ADRD250W

Description:
KOMBIC ACC. Ø250 ADAPTER RING WH.




Product code:
DITRRD240B

Description:
DOMO 220/KOMBIC ACC.TRANSF GLASS BK.



Product code:
DITRRD240G
DITRRD240W

Description:
DOMO 220/KOMBIC ACC.TRANSF GLASS GR.
DOMO 220/KOMBIC ACC.TRANSF GLASS WH.



Product code:
RIRD240B

Description:
DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:
RIRD240G
RIRD240W

Description:
DOMO 220/KOMBIC ACC. DECO RING GR.
DOMO 220/KOMBIC ACC. DECO RING WH.