

## KOMBIC 200 DOWNLIGHT

K32RD30400P840NRW




## KOMBIC 200 G2 RD 3000 IP44 NW OP BR/W

## Description:

Round recessed downlight KOMBIC 200 G2 RD 3000 Reflector made of recycled polycarbonate. Inner reflector finished in bright metallized. Elliptical optic option is the perfect choice for lighting walkways and longitudinal areas such as counters or areas adjacent to work areas. This product allows for increased spacing between luminaires, reducing the effect of residual light on walls and providing a pleasant atmosphere in the space. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 4000K and CRI80. Electronic ON OFF gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 82.000 L80 B10. Available finish: White. Environmental Product Declaration - EPD® available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE

Weight: 745 g

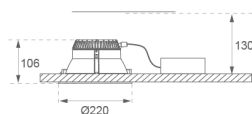


Installation: Recessed

## TECHNICAL SPECIFICATIONS:

Light output:	2.304 lm	°K :	4000
Plum:	16,7W	CRI :	80
Efficacy:	138 lm/w	MacAdam:	3
UGR:	>19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Electronic
LED Lifetime:	82.000 L80 B10 (Ta=25°C)		
Power:	14,5W		

Light output tolerance +/- 10%

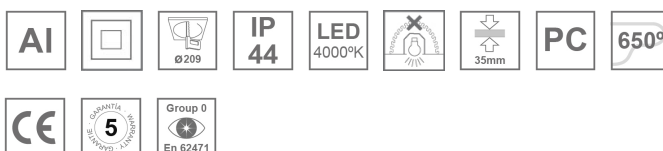

## CUSTOM MADE OPTIONS:




KOMBIC 200 DOWNLIGHT

K32RD30400P840NRW

KOMBIC 200 G2 RD 3000 IP44 NW OP BR/W

PHOTOMETRIC DATA :

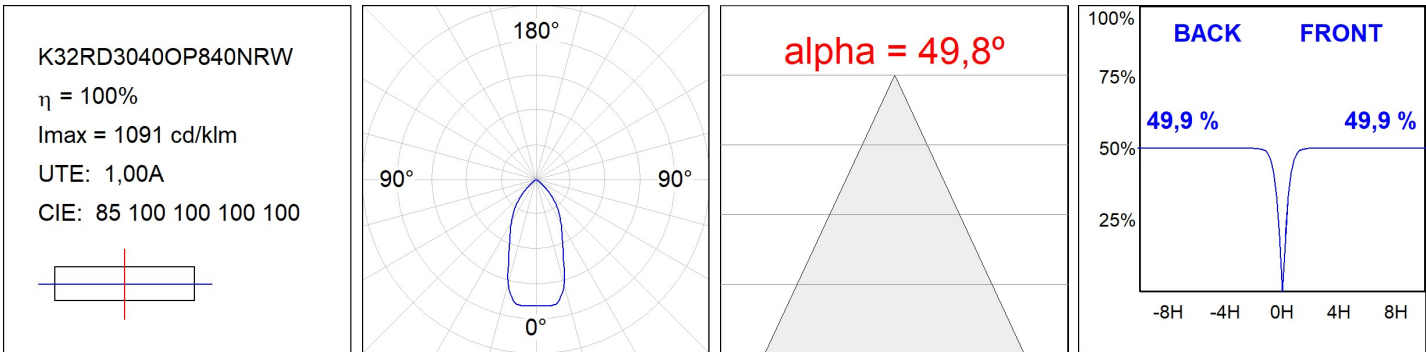

## ACCESORIES :

### Optical



**Product code:**

ADRD250W

**Description:**

KOMBIC ACC. Ø250 ADAPTER RING WH.



**Product code:**

DITRRD240B

**Description:**

DOMO 220/KOMBIC ACC. TRANSP GLASS BK.



**Product code:**

DITRRD240G

**Description:**

DOMO 220/KOMBIC ACC. TRANSP GLASS GR.

DITRRD240W

DOMO 220/KOMBIC ACC. TRANSP GLASS WH.



**Product code:**

RIRD240B

**Description:**

DOMO 220/KOMBIC ACC. DECO RING BK.



**Product code:**

RIRD240G

**Description:**

DOMO 220/KOMBIC ACC. DECO RING GR.

RIRD240W

DOMO 220/KOMBIC ACC. DECO RING WH.