

KOMBIC 200 DOWNLIGHT

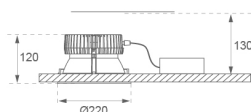
K32RD7040OP830DRW



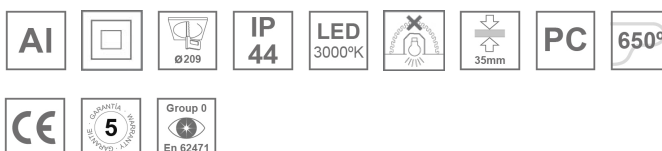
KOMBIC 200 G2 RD 7000 IP44 WW OP DA BR/W

Description:

Round recessed downlight KOMBIC 200 G2 RD 7000 Reflector made of recycled polycarbonate. Inner reflector finished in bright metallized. Elliptical optic option is the perfect choice for lighting walkways and longitudinal areas such as counters or areas adjacent to work areas. This product allows for increased spacing between luminaires, reducing the effect of residual light on walls and providing a pleasant atmosphere in the space. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 3000K and CRI80. Electronic DALI gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 66.000 L80 B10. Available finish: White. Environmental Product Declaration - EPD® available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE**Weight:** 1.676 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	5.480 lm	°K :	3000
Plum:	51W	CRI :	80
Efficacy:	107,5 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	66.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI2
Power:	45,2W		

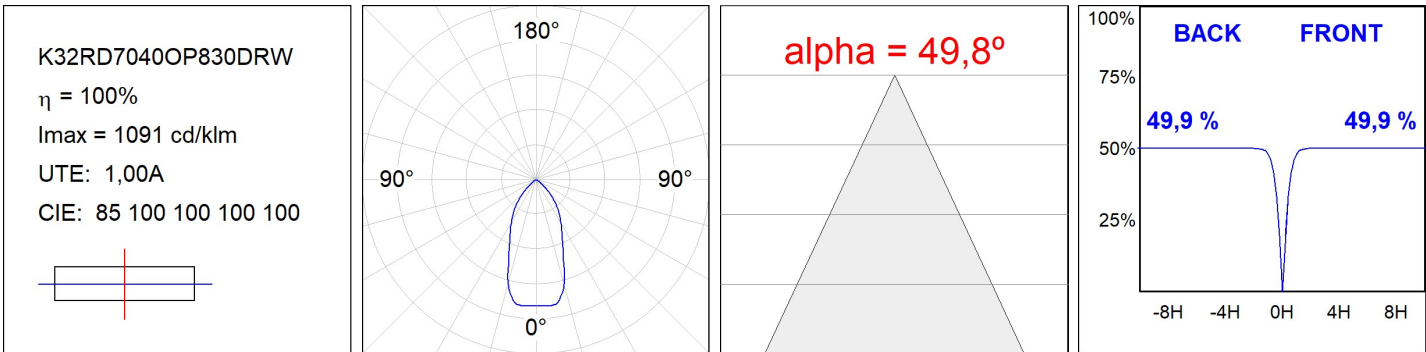
Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 200 DOWNLIGHT

K32RD70400P830DRW

KOMBIC 200 G2 RD 7000 IP44 WW OP DA BR/W

PHOTOMETRIC DATA :



ACCESORIES :

Optical



Product code:

ADRD250W

Description:

KOMBIC ACC. Ø250 ADAPTER RING WH.



Product code:

DITRRD240B

Description:

DOMO 220/KOMBIC ACC.TRANSF GLASS BK.



Product code:

DITRRD240G

Description:

DOMO 220/KOMBIC ACC.TRANSF GLASS GR.

DITRRD240W

DOMO 220/KOMBIC ACC.TRANSF GLASS WH.



Product code:

RIRD240B

Description:

DOMO 220/KOMBIC ACC. DECO RING BK.



Product code:

RIRD240G

Description:

DOMO 220/KOMBIC ACC. DECO RING GR.

RIRD240W

DOMO 220/KOMBIC ACC. DECO RING WH.