Product datasheet

# KOMBIC 200 SURFACE

LAMP
Worktitude for light

K32SF4020OP830NRW

KOMBIC 200 G2 SF 4000 IP20 WW OP BR/WH

Description:

Round recessed downlight KOMBIC 200 G2 SF 4000 Reflector made of recycled polycarbonate. Inner reflector finished in bright metallized. Elliptical optic option is the perfect choice for lighting walkways and longitudinal areas such as counters or areas adjacent to work areas. This product allows for increased spacing between luminaires, reducing the effect of residual light on walls and providing a pleasant atmosphere in the space. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 3000K and CRI80.Electronic ON OFF gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 71.000 L80 B10. Available finish: White.Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE

Weight: 1.479 g

230

ø197 mm

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	3.025 lm		**ºK :**	3000
Plum:	24,1W		**CRI :**	80
Efficacy:	125,5 lm/w		**MacAdam:**	3
UGR:	<19		**Power Supply:**	220-240V 50/60Hz
Type:	COB		**Gear:**	Electronic
LED Lifetime:	71.000 L80 B10 (Ta=25ºC)			
Power:	21,5W			

Light output tolerance +/- 10%

CLASE I	IP 20	LED 3000ºK	PC	650º

| CE | GARANTÍA 5 WARRANTY GARANTIE | Group 0 En 62471 | | |

CUSTOM MADE OPTIONS:

1-10V | (half circle icon) | (battery icon) | ✴ Bluetooth | CRI | ↑lm | LED RETAIL | DALI | PUSH | TRIAC | K | TW | WB

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

15-05-2025

Pág.   1 / 3

K32SF4020OP830NRW   KOMBIC 200 G2 SF 4000 IP20 WW OP BR/WH

PHOTOMETRIC DATA :

K32SF4020OP830NRW

η = 100%

Imax = 1091 cd/klm

UTE: 1,00A

CIE: 85 100 100 100 100

180°

90°   90°

0°

alpha = 49,8°

100%
75%
50%
25%

BACK   FRONT

49,9 %   49,9 %

-8H   -4H   0H   4H   8H

15-05-2025

Pág.   2 / 3

LAMP
Worktitude for light
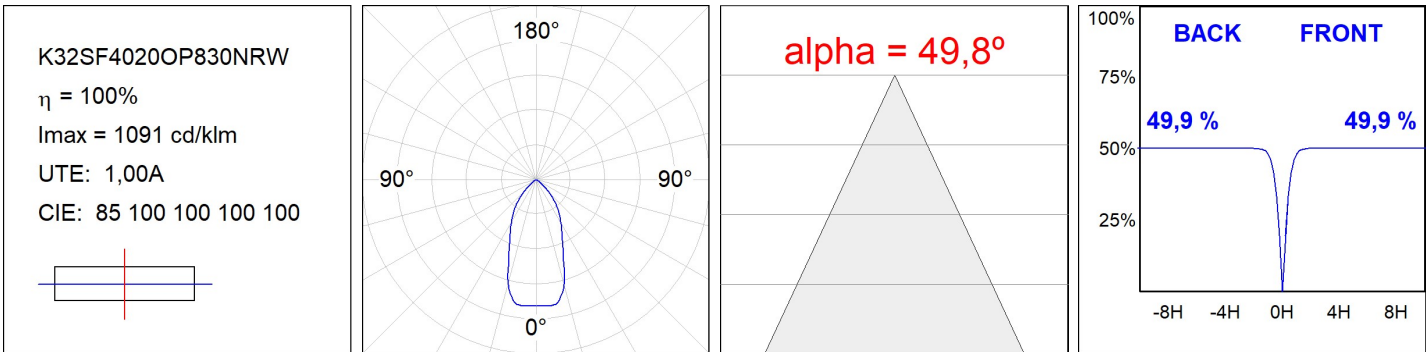
ACCESORIES :

Assembly

Product code:	**Description:**
K3SUCOW	KOMBIC 200 SF ACC. COVER

ACCESORIES :

Suspension

Product code:	**Description:**	**Product code:**	**Description:**
SUCARG0100G	ACC. ELECMEC RIGID SUSP 100MM GR.	SUCARG0100W	ACC. ELECMEC RIGID SUSP 100MM WH.
SUCARG0250G	ACC. ELECMEC RIGID SUSP 250MM GR.	SUCARG0250W	ACC. ELECMEC RIGID SUSP 250MM WH.
SUCARG0500G	ACC. ELECMEC RIGID SUSP 500MM GR.	SUCARG0500W	ACC. ELECMEC RIGID SUSP 500MM WH.
SUCARG1000G	ACC. ELECMEC RIGID SUSP 1000MM GR.	SUCARG1000W	ACC. ELECMEC RIGID SUSP 1000MM WH.

Product code:	**Description:**	**Product code:**	**Description:**
SUEM2W3000NG	ACC. DB ELECMEC SUSP GR.	SUEM2W3000NW	ACC. DB ELECMEC SUSP WH.