



## KOMBIC 70 DOWNLIGHT

K711523RF927N66




## KOMBIC 70 1500 IP23 927 RF FL SER

**Description:**

Recessed round downlight model KOMBIC 70. R-PC FR WHITE tm recycled polycarbonate reflector with bromine-free flame retardant. Flammability degree V0 according to UL94. Flood reflector for greater efficiency and control of light distribution and glare reduction UGR<16. Aluminum injection heatsink, with a black finish. COB LED, with 2700K color temperature with CRI90. Electronic equipment ON OFF included. With an IP23 degree of protection. Insulation class II. Photobiological safety group 0. Lifespan: 72,000 L80 B10. Available finish SERENA palette (Arena, Bronze, Champagne, Dark Chocolate, Dark Grey, Terracotta). Luminous flux tolerance  $\pm 4\%$  depending on the finish.

**Finish:** SERENA Palette**Weight:** 190 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 854 lm                   | <b>°K :</b>          | 2700             |
| <b>Plum:</b>         | 10W                      | <b>CRI :</b>         | 90               |
| <b>Efficacy:</b>     | 85,4 lm/w                | <b>R9 :</b>          | 57               |
| <b>UGR:</b>          | <16                      | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | COB                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 66.000 L90 B10 (Ta=25°C) | <b>Gear:</b>         | Electronic       |
| <b>Power:</b>        | 8,4W                     |                      |                  |

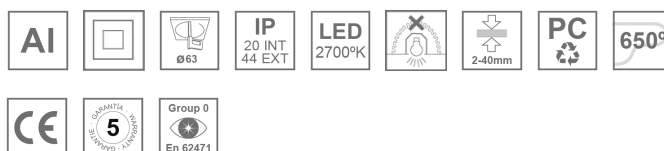**Light output tolerance  $\pm 10\%$** **CUSTOM MADE OPTIONS:**