


## KOMBIC 70 DOWNLIGHT

K711523RW927DBB

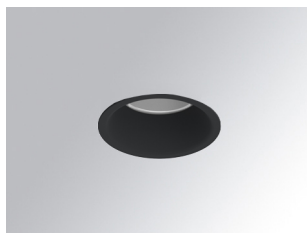


## - KOMBIC 70 1500 IP23 9VWW RF WFL DA BK/BK

**Description:**

KOMBIC 70 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in black. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic DALI wiring included. Insulation class II. LED life time: 66000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector Wide Flood to achieve a controlled light distribution and low UGR<16

**Finish:** Matte black RAL 9011**Weight:** 190 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	730 lm	<b>°K :</b>	2700
<b>Plum:</b>	9,5W	<b>CRI :</b>	90
<b>Efficacy:</b>	76,9 lm/w	<b>R9 :</b>	59
<b>UGR:</b>	<16	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	66.000 L90 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	8,4W		

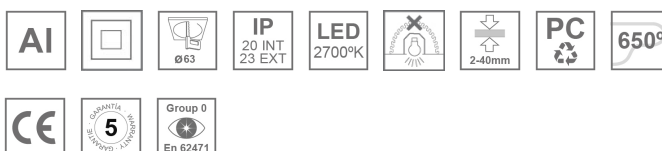**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 70 DOWNLIGHT

K711523RW927DBB

KOMBIC 70 1500 IP23 9VWW RF WFL DA BK/BK

PHOTOMETRIC DATA :

