


## KOMBIC 70 DOWNLIGHT

K711523WF840DBB




## - KOMBIC 70 1500 IP43 NW WFL DA BK/BK

**Description:**

KOMBIC 70 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in black. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 4000K with CRI80. Luminaire with electronic wiring Dali included. Insulation class II. LED life time: 66000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. Optic Wide Flood to achieve a controlled light distribution and low UGR<16

**Finish:** Matte black RAL 9011**Weight:** 190 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 911 lm                   | <b>°K :</b>          | 4000             |
| <b>Plum:</b>         | 9,5W                     | <b>CRI :</b>         | 80               |
| <b>Efficacy:</b>     | 95,9 lm/w                | <b>MacAdam:</b>      | 3                |
| <b>UGR:</b>          | <16                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>Type:</b>         | COB                      | <b>Gear:</b>         | Adjustable DALI  |
| <b>LED Lifetime:</b> | 66.000 L90 B10 (Ta=25°C) |                      |                  |
| <b>Power:</b>        | 8,4W                     |                      |                  |

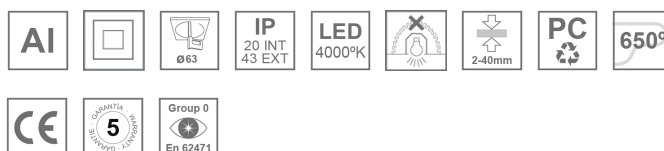**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 70 DOWNLIGHT

K711523WF840DBB

KOMBIC 70 1500 IP43 NW WFL DA BK/BK

PHOTOMETRIC DATA :

