

# KOMBIC 70 DOWNLIGHT


K711523WF927DWW



## KOMBIC 70 1500 IP23 9VWW WFL DA WH/WH

### Description:


KOMBIC 70 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in white. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring Dali included. Insulation class II. LED life time: 66000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Optic Wide Flood to achieve a controlled light distribution and low glare level, less than UGR<19



**Finish:** Matte white RAL 9010

**Weight:** 190 g


**Installation:** Recessed

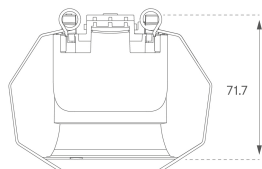

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	795 lm	<b>°K :</b>	2700
<b>Plum:</b>	9,5W	<b>CRI :</b>	90
<b>Efficacy:</b>	83,6 lm/w	<b>R9 :</b>	59
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	66.000 L90 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	8,4W		

*Light output tolerance +/- 10%*

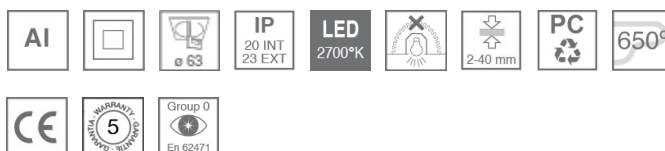

### CUSTOM MADE OPTIONS:



# KOMBIC 70 DOWNLIGHT

K711523WF927DWW

KOMBIC 70 1500 IP23 9VWW WFL DA WH/WH

**PHOTOMETRIC DATA :**

K711523WF927DWW  
 $\eta = 100\%$   
 $I_{max} = 1458 \text{ cd/klm}$   
 UTE: 1,00A  
 CIE: 92 97 100 100 100

