

KOMBIC 70 DOWNLIGHT


K711523WF940NBB



KOMBIC 70 1500 IP23 9NW WFL BK/BK


Description:

KOMBIC 70 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in black. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring included. Insulation class II. LED life time: 66000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Optic Wide Flood to achieve a controlled light distribution and low UGR<16



Finish: Matte black RAL 9011

Weight: 190 g




Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	788 lm	°K :	4000
Plum:	9,5W	CRI :	90
Efficacy:	83 lm/w	R9 :	68
UGR:	<16	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	66.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	8,4W		

Light output tolerance +/- 10%

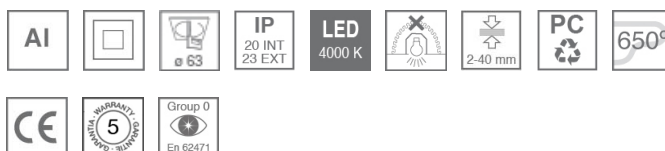

CUSTOM MADE OPTIONS:



KOMBIC 70 DOWNLIGHT

K711523WF940NBB

KOMBIC 70 1500 IP23 9NW WFL BK/BK

PHOTOMETRIC DATA :

K711523WF940NBB
 $\eta = 100\%$
 $I_{max} = 1601 \text{ cd/klm}$
 UTE:
 CIE: 99 100 100 100 100

