



## KOMBIC 70 DOWNLIGHT

K711523WW827DBB




## KOMBIC 70 1500 IP43 VWW WW DA BK/BK

**Description:**

LAMP Round recessed downlight KOMBIC 70 1500 Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K and CRI80. Electronic DALI gear included. IP43 rated. Insulation Class II. Photobiological safety group 0. LED life time: 72.000 L80 B10. Available finishes: White and black.

**Finish:** Matte black RAL 9011**Weight:** 210 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 515 lm                   | <b>°K :</b>          | 2700             |
| <b>Plum:</b>         | 10W                      | <b>CRI :</b>         | 80               |
| <b>Efficacy:</b>     | 51,5 lm/w                | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | COB                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 72.000 L80 B10 (Ta=25°C) | <b>Gear:</b>         | Adjustable DALI  |
| <b>Power:</b>        | 8,4W                     |                      |                  |

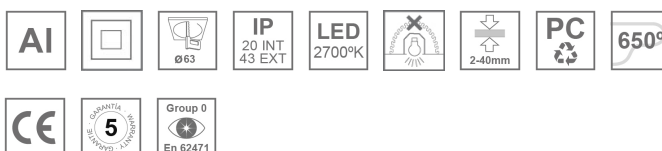*Light output tolerance +/- 10%***CUSTOM MADE OPTIONS:**

KOMBIC 70 DOWNLIGHT

K711523WW827DBB

KOMBIC 70 1500 IP43 VWW WW DA BK/BK

PHOTOMETRIC DATA :

