

## KOMBIC 70 DOWNLIGHT

K711523WW927NWW



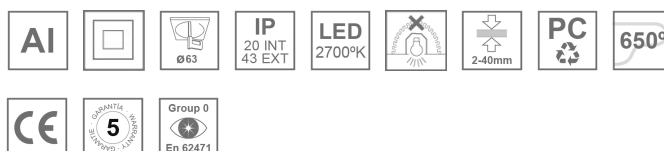
## KOMBIC 70 1500 IP43 9VWW WW WH/WH

**Description:**

LAMP Round recessed downlight KOMBIC 70 1500 Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K and CRI90. Electronic ON OFF gear included. IP43 rated. Insulation Class II. Photobiological safety group 0. LED life time: 72.000 L80 B10. Available finishes: White and black.

**Finish:** Matte white RAL 9010**Weight:** 210 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	695 lm	<b>°K :</b>	2700
<b>Plum:</b>	10W	<b>CRI :</b>	90
<b>Efficacy:</b>	69,5 lm/w	<b>R9 :</b>	68
<b>Type:</b>	COB	<b>MacAdam:</b>	3
<b>LED Lifetime:</b>	72.000 L80 B10 (Ta=25°C)	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Power:</b>	8,4W	<b>Gear:</b>	Electronic

*Light output tolerance +/- 10%***CUSTOM MADE OPTIONS:**

KOMBIC 70 DOWNLIGHT

K711523WW927NWW

KOMBIC 70 1500 IP43 9VWW WW WH/WH

PHOTOMETRIC DATA :

