


## KOMBIC 70 DOWNLIGHT

K711544OP830NWW




## KOMBIC 70 1500 IP44 WW OPAL WH/WH

**Description:**

KOMBIC 70 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in white and opal optical sheet. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 3000K with CRI80. Luminaire with electronic wiring included. Insulation class II. LED life time: 66000 L90 B10. With IP44 degree of protection. Group 0 photobiological safety.

**Finish:** Matte white RAL 9010**Weight:** 190 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 935 lm                   | <b>°K :</b>          | 3000             |
| <b>Plum:</b>         | 9,5W                     | <b>CRI :</b>         | 80               |
| <b>Efficacy:</b>     | 98,4 lm/w                | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | COB                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 66.000 L90 B10 (Ta=25°C) | <b>Gear:</b>         | Electronic       |
| <b>Power:</b>        | 8,4W                     |                      |                  |

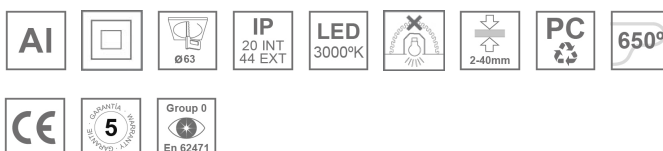**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 70 DOWNLIGHT

K711544OP830NWW

KOMBIC 70 1500 IP44 WW OPAL WH/WH

PHOTOMETRIC DATA :

