


## KOMBIC 70 SURFACE

K71SF1540OP927D66




## KOMBIC 70 SF 1500 IP40 927 OPAL D SER

**Description:**

Downlight for surface mount or suspension model KOMBIC 70 SF 1500. Body made of recycled aluminum extrusion with a rate of 75% and reflector made of recycled polycarbonate R-PC FR WHITE TM with bromine-free flame retardant. Flammability grade V0 according to UL94. Opal optical film. Heat sink made of aluminum injection. LED COB, with color temperature 2700K with CRI90. DALI electronic equipment included. With a protection degree of IP43. Insulation class I. Photobiological safety group 0. Lifespan: 72,000 L80 B10 hours. Available finish SERENA palette (Arena, Bronze, Champagne, Dark Chocolate, Dark Grey, Terracotta). Tolerance of luminous flux  $\pm 7\%$  according to finish.

**Weight:** 570 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

<b>Plum:</b>	10,8W	<b>°K :</b>	2700
<b>Type:</b>	COB	<b>CRI :</b>	90
<b>LED Lifetime:</b>	72.000 L80 B10 (Ta=25°C)	<b>R9 :</b>	61
		<b>MacAdam:</b>	3
		<b>Power Supply:</b>	220-240V 50/60Hz
		<b>Gear:</b>	Adjustable DALI

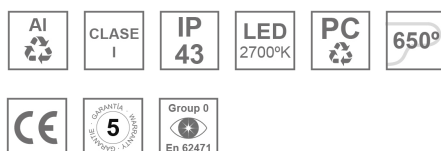**CUSTOM MADE OPTIONS:**

KOMBIC 70 SURFACE

ACCESORIES :

Suspension



Product code:

K71SUCAWI2000D66

Description:

KOMBIC 70 SF ACC. ELEC 5P SUSP 2M SMS