


KOMBIC 70 SUT

K71ST1540OP827DWW



KOMBIC 70 SUT 1500 IP40 VWW OP D W/W

Description:

LAMP Suspended or ceiling mounting downlight KOMBIC 70 SUT 1500. Body made of recycled aluminium extrusion at a rate of 75% and reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in white and opal optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K and IRC80. Electronic DALI gear included. IP40 rated. Insulation Class II. Photobiological safety group 0. LED life time: 72.000 L80 B10. White finish.


Finish: Matte white RAL 9010

Weight: 650 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 892 lm | °K : | 2700 |
| Plum: | 10,3W | CRI : | 80 |
| Efficacy: | 86,6 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 72.000 L80 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 8,4W | | |

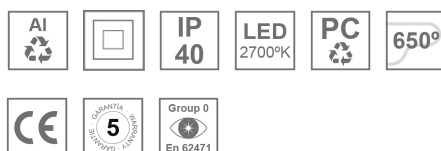Light output tolerance +/- 10%


CUSTOM MADE OPTIONS:



K71ST1540OP827DWW

KOMBIC 70 SUT 1500 IP40 VWW OP D W/W

PHOTOMETRIC DATA :

