


KOMBIC 70 SUT

K71ST1540OP840N66




KOMBIC 70 SUT 1500 IP40 840 OPAL SER

Description:

Downlight to suspend from a three-phase track model KOMBIC 70 ST 1500. Body made of recycled aluminum extrusion with a 75% rate and reflector made of recycled polycarbonate R-PC FR WHITE TM with bromine-free flame retardant. Flammability grade V0 according to UL94. Opal optical film. Heat sink made of aluminum injection. LED COB, with a color temperature of 4000K with CRI80. ON OFF electronic equipment included. With an IP40 protection rating. Insulation class II. Photobiological safety group 0. Lifespan: 72,000 L80 B10. Available finish SERENA palette (Arena, Bronze, Champagne, Dark Chocolate, Dark Grey, Terracotta). Tolerance of luminous flux $\pm 7\%$ according to finish.

Weight: 610 g**Installation:** Suspended**TECHNICAL SPECIFICATIONS:**

Type:	COB	°K :	4000
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	CRI :	80
Power:	8,4W	MacAdam:	3
		Power Supply:	220-240V 50/60Hz
		Gear:	Electronic

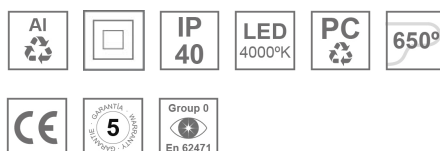**CUSTOM MADE OPTIONS:**