


## KOMBIC 70 TRACK

K71TS1540OP930NWW




## KOMBIC 70 TS 1500 IP40 9WW OP W/W

**Description:**

Downlight to attach to three-phase track model KOMBIC 70 TS 1500 from the LAMP brand. Body made of recycled aluminum extrusion with a rate of 75% and R-PC FR WHITE TM recycled polycarbonate reflector with bromine-free flame retardant. Flammability grade V0 according to UL94. Interior reflector finished in white color Opal optical sheet Heatsink made of aluminum injection. COB LED, with 3000K color temperature with CRI90. ON OFF electronic equipment included. With an IP40 protection degree. Insulation class II. Photobiological safety group 0. LED life time: 72,000 L80 B10. Finished in white.

**Finish:** Matte white RAL 9010**Weight:** 560 g**Installation:** 3-Circuit track**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	796 lm	<b>°K :</b>	3000
<b>Plum:</b>	10,5W	<b>CRI :</b>	90
<b>Efficacy:</b>	75,8 lm/w	<b>R9 :</b>	54
<b>Type:</b>	COB	<b>MacAdam:</b>	3
<b>LED Lifetime:</b>	72.000 L80 B10 (Ta=25°C)	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Power:</b>	8,4W	<b>Gear:</b>	Electronic

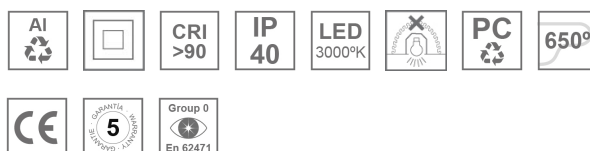**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

K71TS1540OP930NWW

KOMBIC 70 TS 1500 IP40 9WW OP W/W

**PHOTOMETRIC DATA :**

