


## KOMBIC 70 TRACK

K71TS1540OP940DWW




## KOMBIC 70 TS 1500 IP40 9NW OP D W/W

**Description:**

Downlight to attach to three-phase track model KOMBIC 70 TS 1500 from the LAMP brand. Body made of recycled aluminum extrusion with a rate of 75% and R-PC FR WHITE TM recycled polycarbonate reflector with bromine-free flame retardant. Flammability grade V0 according to UL94. Interior reflector finished in white color Opal optical sheet Heatsink made of aluminum injection. COB LED, with 4000K color temperature with CRI90. DALI electronic equipment included. With an IP40 protection degree. Insulation class II. Photobiological safety group 0. LED life time: 72,000 L80 B10. Finished in white.

**Finish:** Matte white RAL 9010**Weight:** 600 g**Installation:** 3-Circuit track**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	849 lm	<b>°K :</b>	4000
<b>Plum:</b>	10,5W	<b>CRI :</b>	90
<b>Efficacy:</b>	82,4 lm/w	<b>R9 :</b>	71
<b>Type:</b>	COB	<b>MacAdam:</b>	3
<b>LED Lifetime:</b>	72.000 L80 B10 (Ta=25°C)	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Power:</b>	8,4W	<b>Gear:</b>	Adjustable DALI

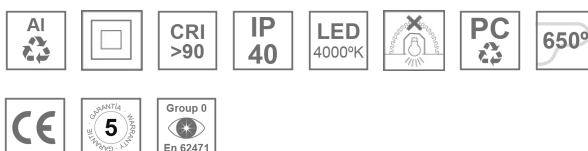**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

K71TS1540OP940DWW

KOMBIC 70 TS 1500 IP40 9NW OP D W/W

**PHOTOMETRIC DATA :**

