Product datasheet

LAMPTUB 60 SUSP. CEILING ROSE

L61SE084LOIO930DW – **LTUB60 SU RE 840 2400 WW D/I OP DALI WH**



Description:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm. Direct-indirect light model with opal polycarbonate diffuser. Model for MID-POWER LED, with colour temperature 3000K with CRI90. Built-in electronic DALI control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Finish: Matte white RAL 9010

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.385 lm	**ºK :**	3000
Plum:	17,4W	**CRI :**	90
Efficacy:	79,6 lm/w	**R9 :**	64
Type:	MID POWER LED	**MacAdam:**	3
LED Lifetime:	72.000 L80 B10 (Ta=25ºC)	**Power Supply:**	220-240V 50/60Hz
Power:	15.1W	**Gear:**	Adjustable DALI

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:

Product datasheet

LAMPTUB 60 SUSP. CEILING ROSE

L61SE084LOIO930DW **LTUB60 SU RE 840 2400 WW D/I OP DALI WH**

PHOTOMETRIC DATA :

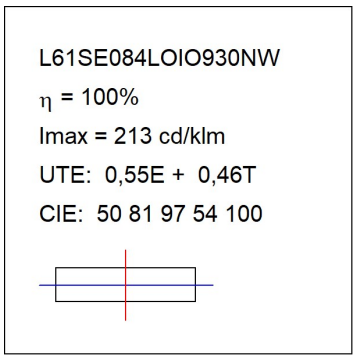

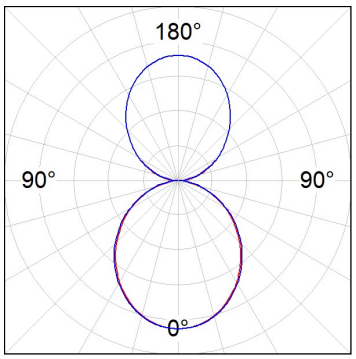

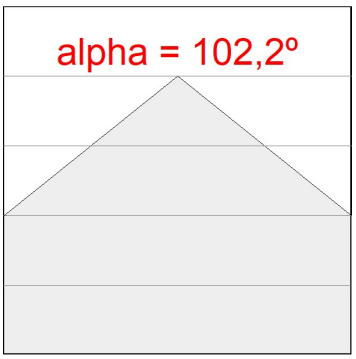

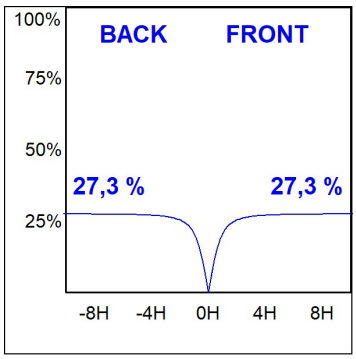

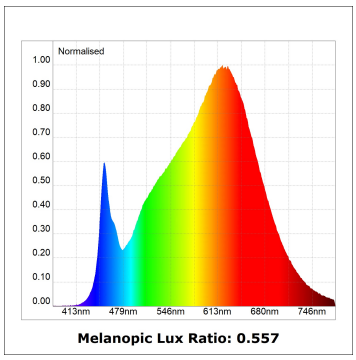

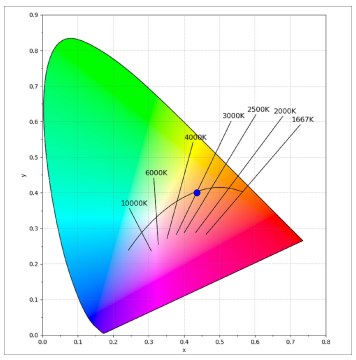

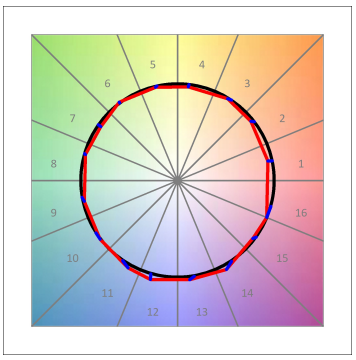

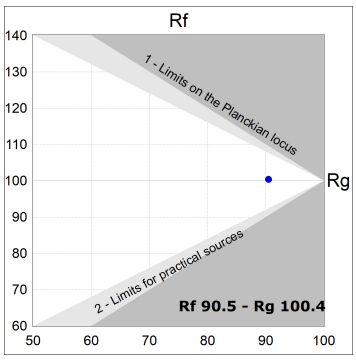

LAMPTUB 60 SUSP. CEILING ROSE

ACCESORIES :

Assembly

Product code:	Description:
L6SUECB	LTUB60 ACC. SUR END COVER BK.

Product code:	Description:
L6SUECW	LTUB60 ACC. SUR END COVER WH.

Product code:	Description:
L6SUECW3	LTUB60 ACC. SUR END COVER WE.

Product code:	Description:
L6SUECW4	LTUB60 ACC. SUR END COVER BS.