

# LAMPTUB 60 SUSP. CEILING ROSE

L61SE084LOIP9TWD3




LTUB60 SU RE 840 2200 TW D/I COMF DA WE

**Description:**

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm. Direct-indirect light model with opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with TW colour temperature with CRI90. Built-in electronic DALI control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

**Finish:** Palette WELLBEING - 3 TEXTURED

**Dimensions:** 847 x 67 x 80 mm



**Installation:** Suspended

**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                     |
|----------------------|--------------------------|----------------------|---------------------|
| <b>Light output:</b> | 1.636 lm                 | <b>°K :</b>          | TW                  |
| <b>Plum:</b>         | 20,9W                    | <b>CRI :</b>         | 90                  |
| <b>Efficacy:</b>     | 78,3 lm/w                | <b>MacAdam:</b>      | 3                   |
| <b>UGR:</b>          | <19                      | <b>Power Supply:</b> | 220-240V 50/60Hz    |
| <b>Type:</b>         | MID POWER LED            | <b>Gear:</b>         | Adjustable DALI DT8 |
| <b>LED Lifetime:</b> | 50.000 L80 B10 (Ta=25°C) |                      |                     |
| <b>Power:</b>        | 15.7W                    |                      |                     |

*Light output tolerance +/- 10%*



**CUSTOM MADE OPTIONS:**










L61SE084LOIP9TWD3

LTUB60 SU RE 840 2200 TW D/I COMF DA WE

PHOTOMETRIC DATA :

L61SE084LOIP9TWD3  
 $\eta = 100\%$   
 $I_{max} = 350 \text{ cd/klm}$   
 UTE: 0,53C + 0,48T  
 CIE: 66 90 99 53 100

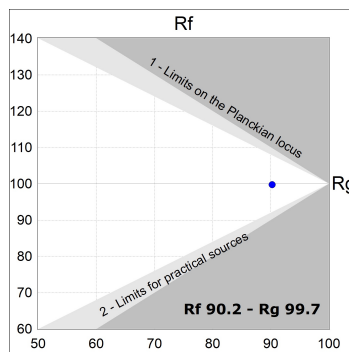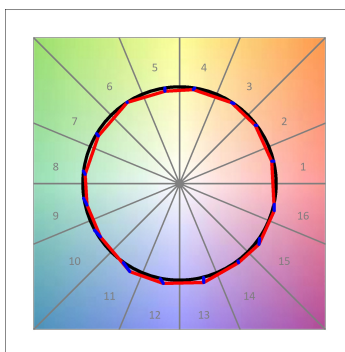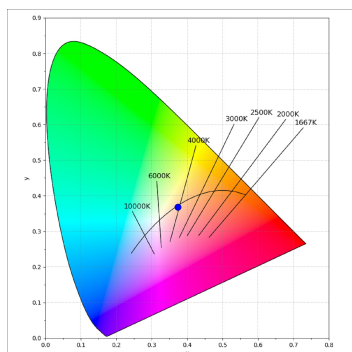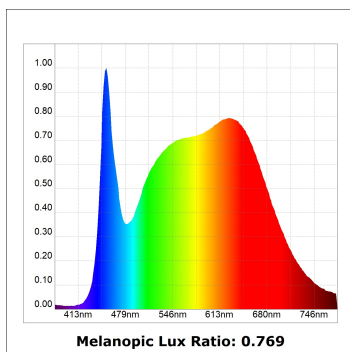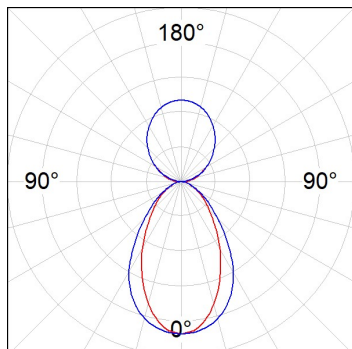

ACCESORIES :

Assembly



**Product code:**  
L6SUECB

**Description:**  
LTUB60 ACC. SUR END COVER BK.



**Product code:**  
L6SUECW

**Description:**  
LTUB60 ACC. SUR END COVER WH.



**Product code:**  
L6SUECW3

**Description:**  
LTUB60 ACC. SUR END COVER WE.



**Product code:**  
L6SUECW4

**Description:**  
LTUB60 ACC. SUR END COVER BS.