# LAMPTUB 60 SUSP. CEILING ROSE


#### L61SE084LOOC930N3

#### LTUB60 SU RE 840 1300 WW COMF WE

## Description:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm, an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with colour temperature 3000K with CRI90. Built-in electronic ON/OFF control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Finish: Palette WELLBEING - 3 TEXTURED




Installation: Suspended

#### **TECHNICAL SPECIFICATIONS:**

Light output:	698 lm	<b>°K</b> :	3000
Plum:	9,7W	CRI :	90
Efficacy:	71,9 lm/w	R9 :	64
UGR:	<19	MacAdam:	3
Туре:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	8.5W		

#### Light output tolerance +/- 10%



#### **CUSTOM MADE OPTIONS:**




Worktitude for light


## LAMPTUB 60 SUSP. CEILING ROSE

L61SE084LOOC930N3

LTUB60 SU RE 840 1300 WW COMF WE



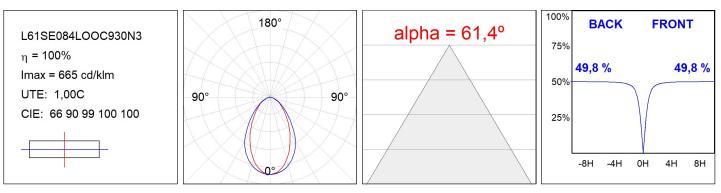

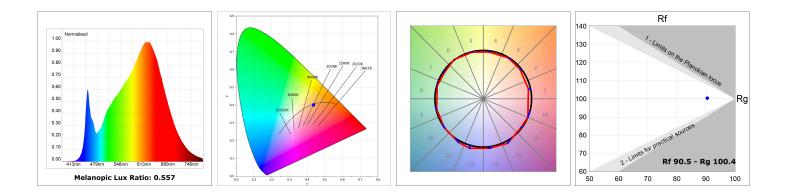

Worktitude for light

# LAMPTUB 60 SUSP. CEILING ROSE

## ACCESORIES :

### Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.