LAMPTUB 60 SUSP. CEILING ROSE

L61SE084MOIO940D4



LTUB60 SU RE 840 3700 NW D/I OP DALI BS

Description:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm. Direct-indirect light model with opal polycarbonate diffuser. Model for MID-POWER LED, with colour temperature 4000K with CRI90. Built-in electronic DALI control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

LAMP 63

Finish: Palette BE SOCIAL - 4 TEXTURED

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	2.246 lm	⁰K :	4000
Plum:	25,9W	CRI :	90
Efficacy:	86,7 lm/w	R9 :	70
Туре:	MID POWER LED	MacAdam:	3
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	27.7W	Gear:	Adjustable DALI

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


LAMPTUB 60 SUSP. CEILING ROSE


L61SE084MOIO940D4

LTUB60 SU RE 840 3700 NW D/I OP DALI BS



PHOTOMETRIC DATA :

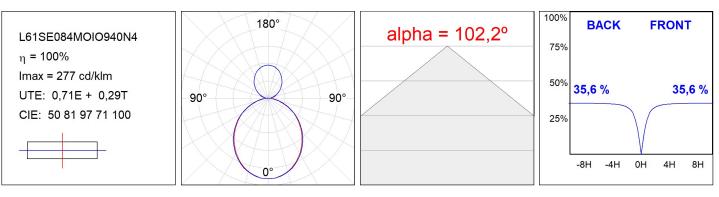

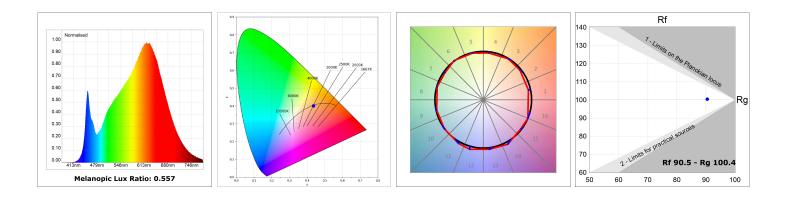

LAMPTUB 60 SUSP. CEILING ROSE

ACCESORIES :

Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.