Product datasheet

LAMPTUB 60 SUSP. CEILING ROSE

L61SE084MOIP940NW



LTUB60 SU RE 840 3700 NW D/I COMF WH

Description:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm. Direct-indirect light model with opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with colour temperature 4000K with CRI90. Built-in electronic ON/OFF control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Finish: Matte white RAL 9010

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	2.127 lm	**ºK :**	4000
Plum:	25,9W	**CRI :**	90
Efficacy:	82,1 lm/w	**R9 :**	69
UGR:	<19	**MacAdam:**	3
Type:	MID POWER LED	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25ºC)	**Gear:**	Electronic
Power:	15.1W		

Light output tolerance +/- 10%

LAMPTUB 60 SUSP. CEILING ROSE

L61SE084MOIP940NW **LTUB60 SU RE 840 3700 NW D/I COMF WH**

PHOTOMETRIC DATA :

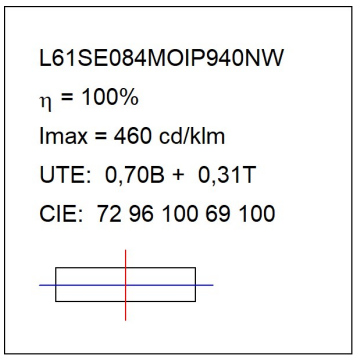

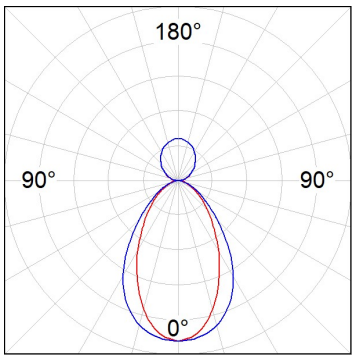

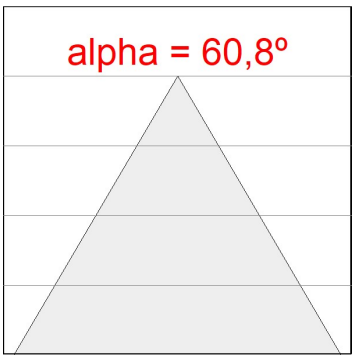

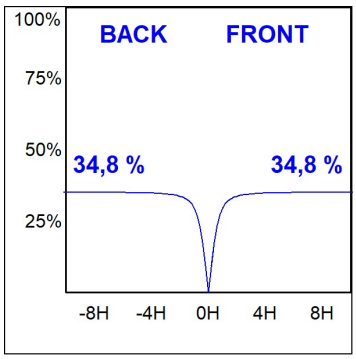

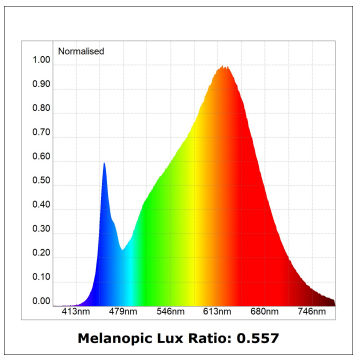

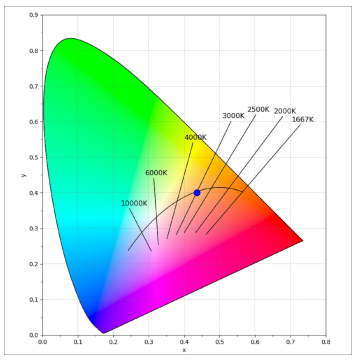

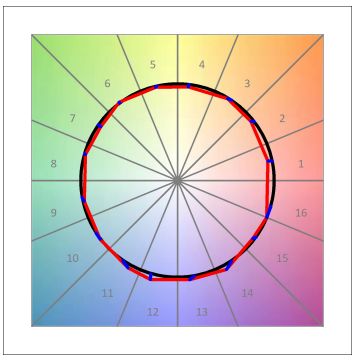

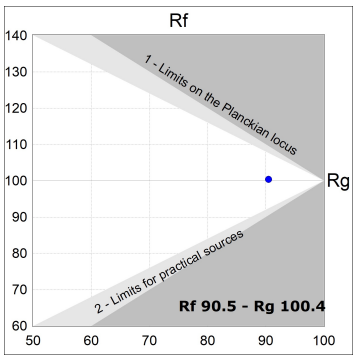

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

LAMPTUB 60 SUSP. CEILING ROSE

ACCESORIES :

Assembly

Product code:	Description:
L6SUECB	LTUB60 ACC. SUR END COVER BK.

Product code:	Description:
L6SUECW	LTUB60 ACC. SUR END COVER WH.

Product code:	Description:
L6SUECW3	LTUB60 ACC. SUR END COVER WE.

Product code:	Description:
L6SUECW4	LTUB60 ACC. SUR END COVER BS.