

LAMP TUB 60 SUSP. CEILING ROSE


L61SE084MOOC9TWDB



LTUB60 SU RE 840 2400 TW COMF DALI BK

Description:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm. Direct-indirect light model with opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with TW colour temperature with CRI90. Built-in electronic DALI control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Finish: Matte black RAL 9011**Dimensions:** 847 x 67 x 80 mm**Installation:** Suspended**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|---------------------|
| Light output: | 1.397 lm | °K : | TW |
| Plum: | 17,2W | CRI : | 90 |
| Efficacy: | 81,2 lm/w | MacAdam: | 3 |
| UGR: | <19 | Power Supply: | 220-240V 50/60Hz |
| Type: | MID POWER LED | Gear: | Adjustable DALI DT8 |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | | |
| Power: | 13.9W | | |


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

LAMPTUB 60 SUSP. CEILING ROSE

L61SE084MOOC9TWDB

LTUB60 SU RE 840 2400 TW COMF DALI BK

PHOTOMETRIC DATA :

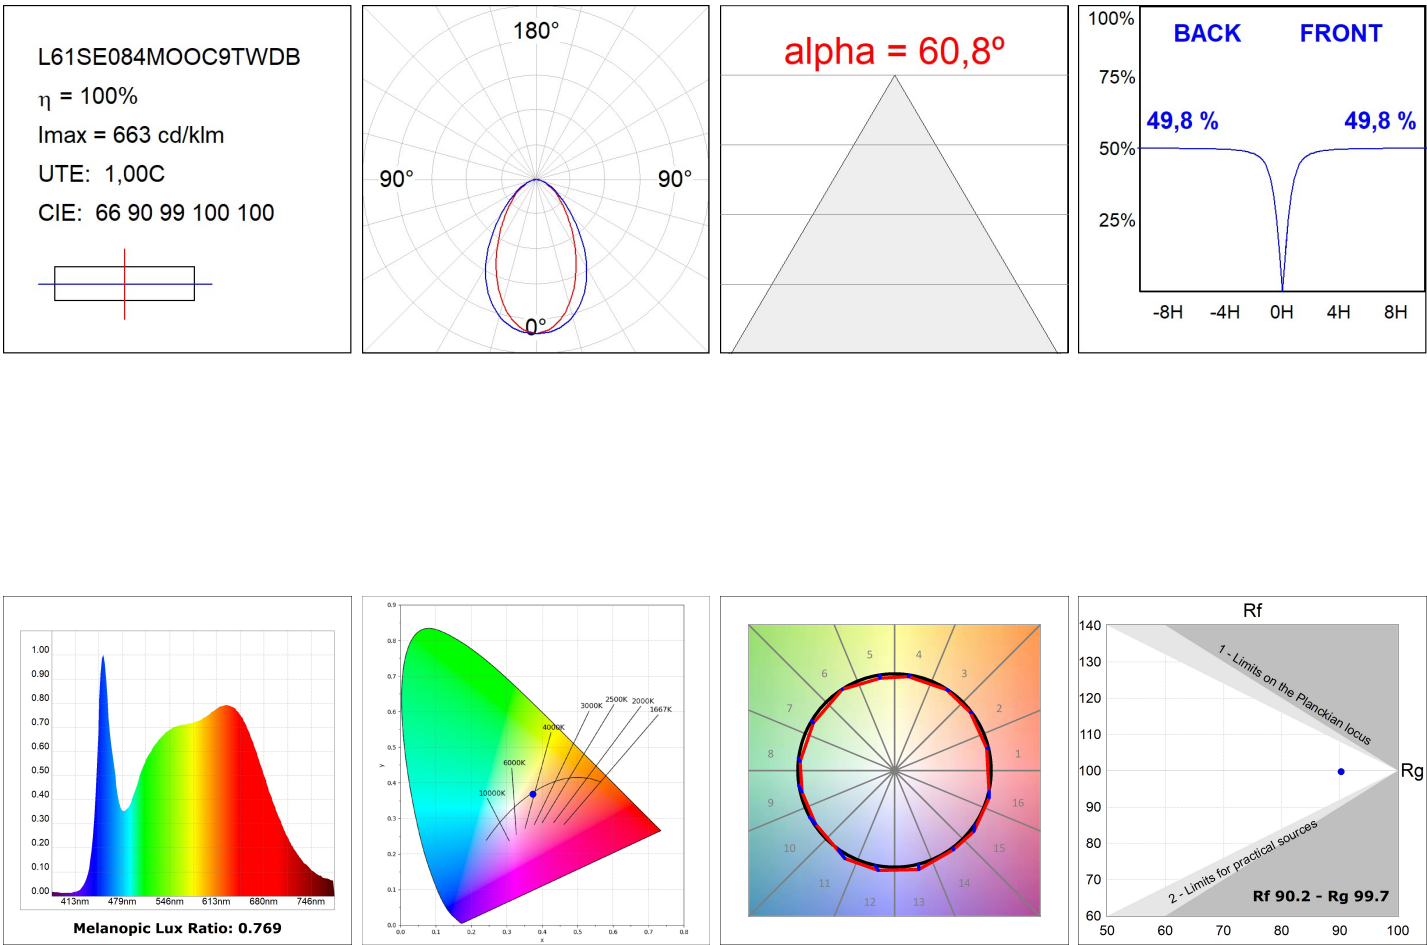

ACCESORIES :

Assembly



Product code:

L6SUECB

Description:

LTUB60 ACC. SUR END COVER BK.



Product code:

L6SUECW

Description:

LTUB60 ACC. SUR END COVER WH.



Product code:

L6SUECW3

Description:

LTUB60 ACC. SUR END COVER WE.



Product code:

L6SUECW4

Description:

LTUB60 ACC. SUR END COVER BS.