

LAMP TUB 60 SUSP. CEILING ROSE

L61SE112MOIO927N3



- LTUB60 SU RE 1120 4700 VWW D/I OP WE

Description:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 1120mm. Direct-indirect light model with opal polycarbonate diffuser. Model for MID-POWER LED, with colour temperature 2700K with CRI90. Built-in electronic ON/OFF control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

Finish: Palette WELLBEING - 3 TEXTURED**Installation:** Suspended**TECHNICAL SPECIFICATIONS:**

Light output:	2.798 lm	°K :	2700
Plum:	35,1W	CRI :	90
Efficacy:	79,7 lm/w	R9 :	57
Type:	MID POWER LED	MacAdam:	3
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	40.5W	Gear:	Electronic

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

L61SE112MOIO927N3

LTUB60 SU RE 1120 4700 VWW D/I OP WE

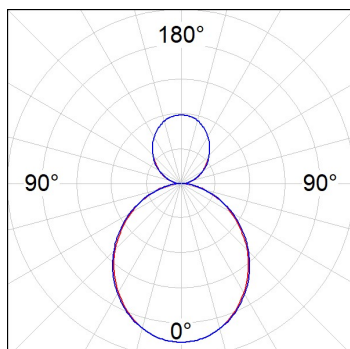

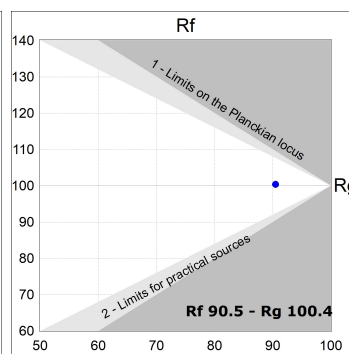
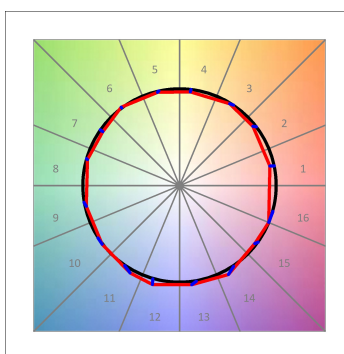
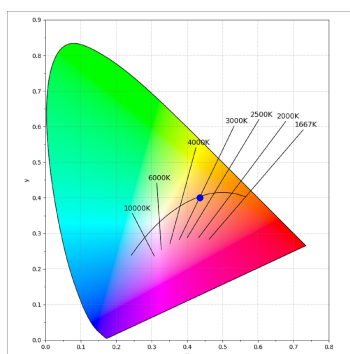
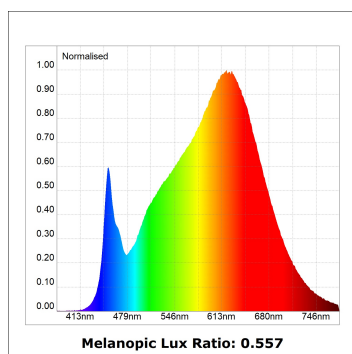


PHOTOMETRIC DATA :

L61SE112MOIO927N3

 $\eta = 100\%$ $I_{max} = 273 \text{ cd/klm}$

UTE: 0,70E + 0,30T

CIE: 50 81 97 70 100

 $\alpha = 102,2^\circ$ 

ACCESORIES :

Assembly



Product code:
L6SUECB

Description:
LTUB60 ACC. SUR END COVER BK.



Product code:
L6SUECW

Description:
LTUB60 ACC. SUR END COVER WH.



Product code:
L6SUECW3

Description:
LTUB60 ACC. SUR END COVER WE.



Product code:
L6SUECW4

Description:
LTUB60 ACC. SUR END COVER BS.