LAMPTUB 60 SUSP. CEILING ROSE

L61SE112MOTE940DW



LTUB60 SU RE 1120 2960 9NW TECH DA WH

Description:

Finish:

Dimensions:

Surface-mounted luminaire, model LAMPTUB 60 TECH by LAMP. Made of 80% recycled aluminium extrusion, with circular section of 60mm and length 1120 mm, with matt black reflector ULTRA COMFORT and optics for light distribution control and low glare UGR<16. Model for MID-POWER LED, with colour temperature 4000K and CRI90. Built-in electronic DALI wiring. With IP20, IK07 degree of protection. Insulation class I/II. Photobiological safety group 0. Lifetime:50000 L90 B10 Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.




Matte white RAL 9010 s: 1.120 x 67 x 80 mm

Installation: Suspended

TECHNICAL SPECIFICATIONS:

| Light output: | 1.760 lm | ⁰K : | 4000 |
|---------------|--------------------------|---------------|------------------|
| Plum: | 17,8W | CRI : | 90 |
| Efficacy: | 98,9 lm/w | R9 : | 85 |
| UGR: | <16 | MacAdam: | 3 |
| Туре: | MID POWER LED | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L90 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 14W | | |

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Worktitude for light


LAMPTUB 60 SUSP. CEILING ROSE


L61SE112MOTE940DW

LTUB60 SU RE 1120 2960 9NW TECH DA WH



PHOTOMETRIC DATA :

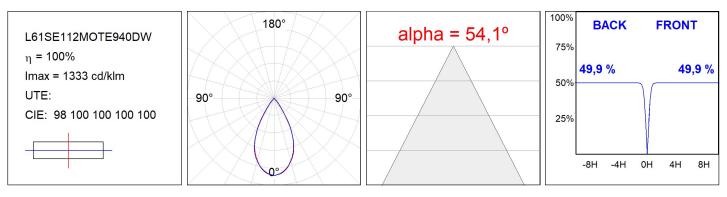

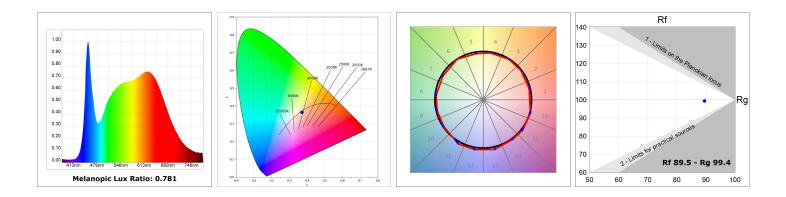

LAMPTUB 60 SUSP. CEILING ROSE

ACCESORIES :

Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE. Product code:

L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.