

## LAMP TUB 60 SUSP. CEILING ROSE

## TECHNICAL DATA ON REVIEW

L61SE168MOIP930DW




LTUB60 SU RE 1680 7300 WW D/I COMF DA WH

**Description:**

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 1680mm. Direct-indirect light model with opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with colour temperature 3000K with CRI90. Built-in electronic DALI control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.

**Finish:** Matte white RAL 9010**Installation:** Suspended**TECHNICAL SPECIFICATIONS:**



<b>Light output:</b>	4.248 lm	<b>°K :</b>	3000
<b>Plum:</b>	52,5W	<b>CRI :</b>	90
<b>Efficacy:</b>	80,9 lm/w	<b>R9 :</b>	64
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	72.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	58.1W		

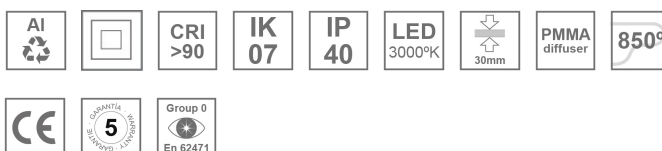*Light output tolerance +/- 10%***CUSTOM MADE OPTIONS:**

LAMPTUB 60 SUSP. CEILING ROSE  
TECHNICAL DATA ON REVIEW

L61SE168MOIP930DW LTUB60 SU RE 1680 7300 WW D/I COMF DA WH

PHOTOMETRIC DATA :

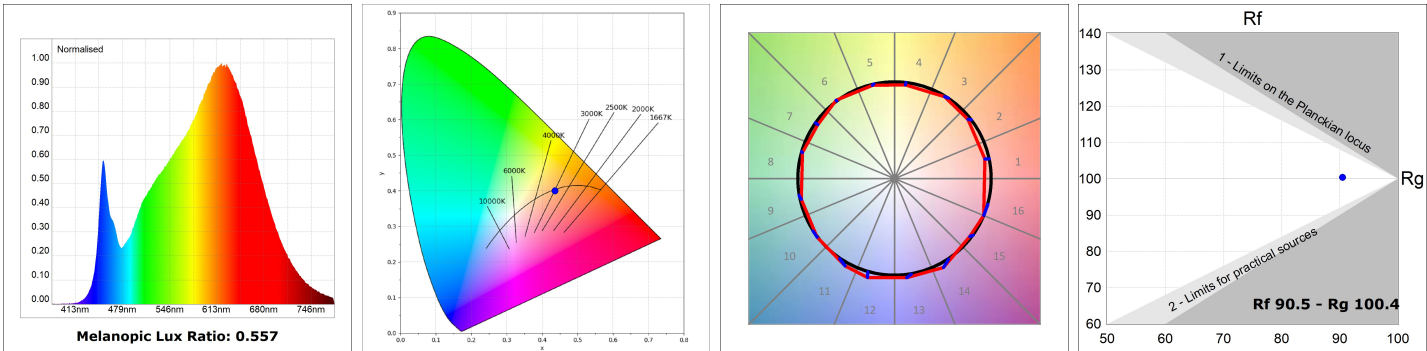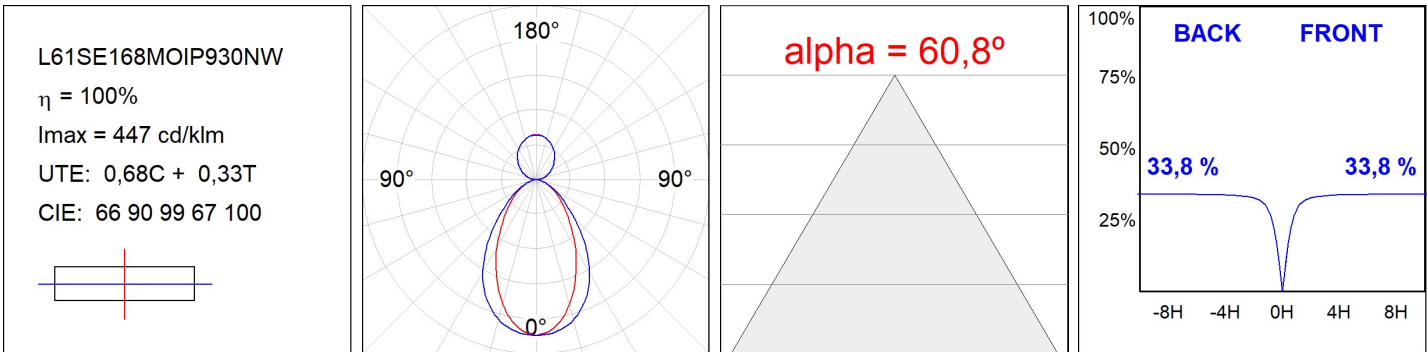

ACCESORIES :

Assembly



**Product code:**

L6SUECB

**Description:**

LTUB60 ACC. SUR END COVER BK.



**Product code:**

L6SUECW

**Description:**

LTUB60 ACC. SUR END COVER WH.



**Product code:**

L6SUECW3

**Description:**

LTUB60 ACC. SUR END COVER WE.



**Product code:**

L6SUECW4

**Description:**

LTUB60 ACC. SUR END COVER BS.