# LAMPTUB 60 SURF. CEILING ROSE

### L61SS084MOOP940D3

#### LTUB60 SU SF 840 2600 NW OPAL DALI WE

#### Description:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 840mm, with opal polycarbonate diffuser. Model for MID-POWER LED, with colour temperature 4000K with CRI90. Built-in electronic DALI control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.




Finish: Palette WELLBEING - 3 TEXTURED

Installation: Suspended

#### **TECHNICAL SPECIFICATIONS:**

Light output:	1.594 lm	⁰K :	4000
Plum:	17,8W	CRI :	90
Efficacy:	89,5 lm/w	R9 :	70
Туре:	MID POWER LED	MacAdam:	3
LED Lifetime:	72.000 L80 B10 (Ta=25ºC)	Power Supply:	220-240V 50/60Hz
Power:	15.1W	Gear:	Adjustable DALI

#### Light output tolerance +/- 10%



## **CUSTOM MADE OPTIONS:**



Worktitude for light


## LAMPTUB 60 SURF. CEILING ROSE


L61SS084MOOP940D3

LTUB60 SU SF 840 2600 NW OPAL DALI WE



### **PHOTOMETRIC DATA :**

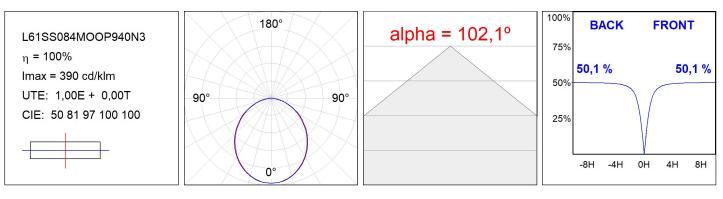

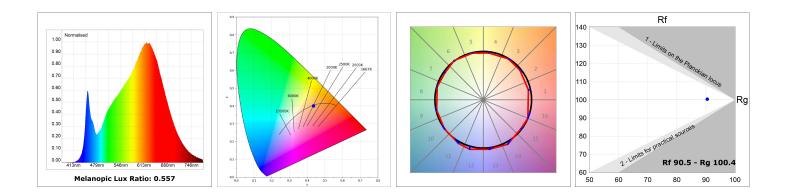

## LAMPTUB 60 SURF. CEILING ROSE

## ACCESORIES :

## Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.