LAMPTUB 60 SURF. CEILING ROSE

L61SS112MOOC927DW

LTUB60 SU SF 1120 3200 VWW COMF DALI WH

Description:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 1120mm, an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with colour temperature 2700K with CRI90. Built-in electronic DALI control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.




Finish: Matte white RAL 9010

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.811 lm	°K :	2700
Plum:	25,4W	CRI :	90
Efficacy:	71,3 lm/w	R9 :	57
UGR:	<19	MacAdam:	3
Туре:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25⁰C)	Gear:	Adjustable DALI
Power:	21.6W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


LAMPTUB 60 SURF. CEILING ROSE


L61SS112MOOC927DW

LTUB60 SU SF 1120 3200 VWW COMF DALI WH



PHOTOMETRIC DATA :

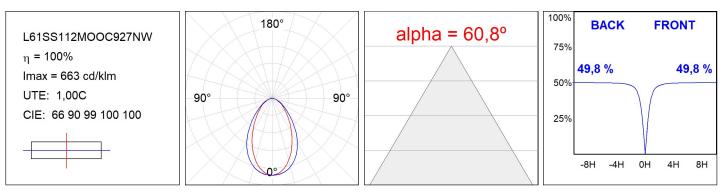

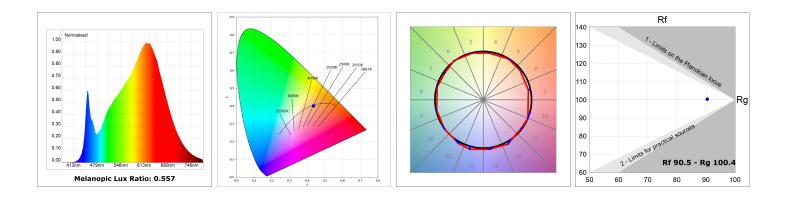

LAMPTUB 60 SURF. CEILING ROSE

ACCESORIES :

Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.