# LAMPTUB 60 SURF. CEILING ROSE

## L61SS112MOOC9TWDW

#### LTUB60 SU SF 1120 3300 TW COMF DALI WH

#### Description:

Finish:

Dimensions:

Surface mounted luminaire Lamptub 60 from LAMP. Made of recycled aluminium extrusion with circular section of 60mm and length of 1120mm, an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with TW colour temperature with CRI90. Built-in electronic DALI control gear. With IP40, IK07 degree of protection. Insulation class I / II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.




Installation: Suspended

Matte white RAL 9010 s: 1.127 x 67 x 80 mm

#### **TECHNICAL SPECIFICATIONS:**

Light output:	1.863 lm	°K :	TW
Plum:	22W	CRI :	90
Efficacy:	84,7 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Туре:	MID POWER LED	Gear:	Adjustable DALI DT8
LED Lifetime:	50.000 L80 B10 (Ta=25⁰C)		
Power:	18.5W		

### Light output tolerance +/- 10%



### **CUSTOM MADE OPTIONS:**




Worktitude for light


## LAMPTUB 60 SURF. CEILING ROSE

L61SS112MOOC9TWDW

LTUB60 SU SF 1120 3300 TW COMF DALI WH



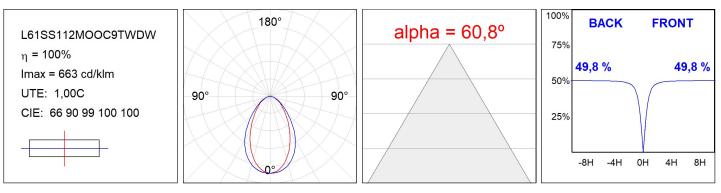

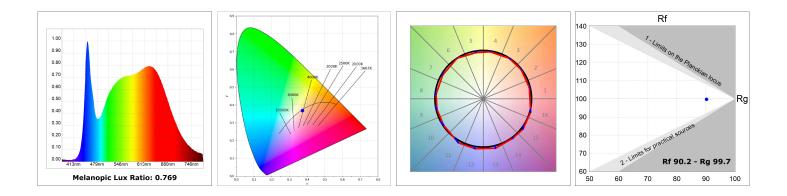

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Worktitude for light

# LAMPTUB 60 SURF. CEILING ROSE

## ACCESORIES :

## Assembly



Product code: L6SUECB

Description: LTUB60 ACC. SUR END COVER BK.



Product code: L6SUECW

Description: LTUB60 ACC. SUR END COVER WH.

Worktitude for light



Product code: L6SUECW3

Description: LTUB60 ACC. SUR END COVER WE.



Product code: L6SUECW4

Description: LTUB60 ACC. SUR END COVER BS.